

24" Ranges



24" Ranges

Features

- Stainless steel front, back, sides, kick plate including back guard and high shelf
- Heavy duty lift-off cast iron burners rated at 25,000 BTU/hr
- 12" x 12" cast iron top grates
- 3/4" thick polished steel griddle plate on applicable models
- Grease trough on griddle models
- Oven size is 20 x 26 x 14"
- Oven burner rated at 27,000 BTU/hr
- Oven pilot with 100% safety shut off
- Stainless steel oven burners and pilots
- Multiple position oven rack guides
- One chrome rack per oven
- Additional racks available
- Manifold operating pressure
- 5"WC/ 11mbar natural gas
- 10"WC/ 25mbar propane

Product Information :

- Optional casters and oven racks available
- One year limited warranty parts and labor

>> **EFI Product Feature:** Shipping specifications are approximate. Units given in pounds or inches.



Specifications subject to change without notice.




Prep & Cooking Equipment

24" Ranges

Specifications

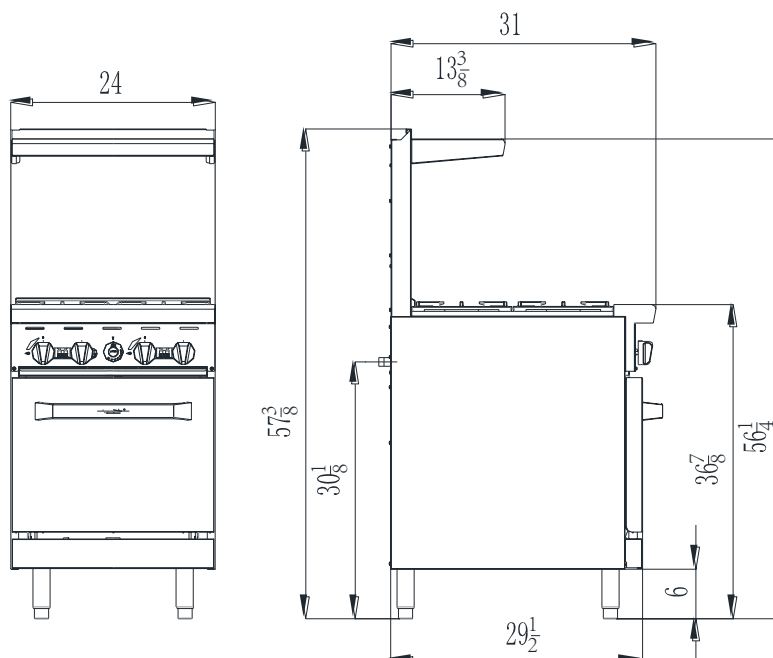

RCTRS-4B



RCTRS-24G

Model	Description	Total B.T.U./h	Shipping Weight lb/kg
RCTRS-4B-N	4 Burners	124,000	403/183
RCTRS-4B-P		116,000	
RCTRS-24G-N	24" Griddle	72,000	462/210
RCTRS-24G-P		72,000	

>> **EFI Product Feature:** Shipping specifications are approximate. Units given in pounds or inches.



Specifications subject to change without notice.

36" Ranges



36" Ranges

Features

- Stainless steel front, back, sides, kick plate including back guard and high shelf
- Heavy duty lift-off cast iron burners rated at 25,000 BTU/hr
- 12" x 12" cast iron top grates
- ¾" thick polished steel griddle plate on applicable models
- Grease trough on griddle models
- Oven size is 26 ½ x 26 x 14"
- Oven burner rated at 27,000 BTU/hr
- Oven pilot with 100% safety shut off
- Stainless steel oven burners and pilots
- Multiple position oven rack guides
- One chrome rack per oven.
- Additional racks available
- Manifold operating pressure
- 5" WC/ 11mbar natural gas
- 10" WC/ 25mbar propane

Product Information :

- Optional casters and oven racks available
- One year limited warranty parts and labor

>> **EFI Product Feature:** Shipping specifications are approximate. Units given in pounds or inches.



Specifications subject to change without notice.




Prep & Cooking Equipment

36" Ranges


Specifications

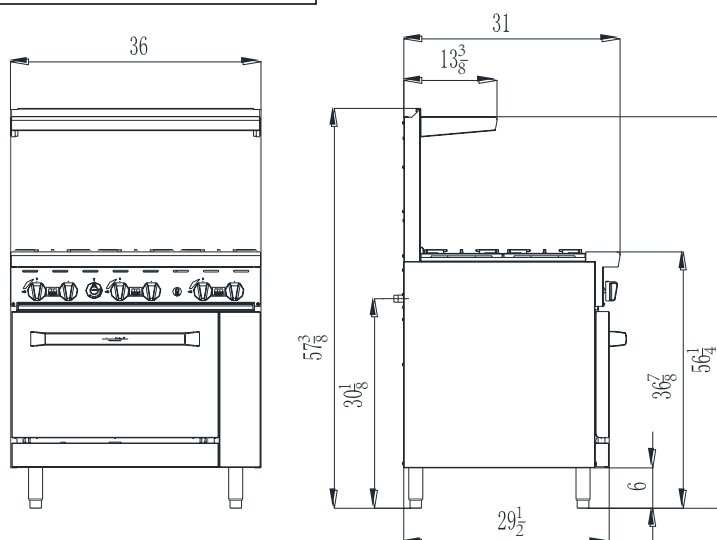


RCTRS-6B




RCTRS-12G-4B




RCTRS-24G-2B



RCTRS-2B-24G



RCTRS-4B-12G



RCTRS-36G

Model	Description	Total B.T.U./h	Shipping Weight lb/kg
RCTRS-6B-N	6 Burners	177,000	532/242
RCTRS-6B-P		165,000	
RCTRS-12G-4B-N	12" Griddle and 4 Burners	148,000	563/256
RCTRS-12G-4B-P		140,000	
RCTRS-24G-2B-N	24" Griddle and 2 Burners	125,000	590/268
RCTRS-24G-2B-P		121,000	
RCTRS-2B-24G-N	2 Burners and 24" Griddle	125,000	590/268
RCTRS-2B-24G-P		121,000	
RCTRS-4B-12G-N	4 Burners and 12" Griddle	148,000	563/256
RCTRS-4B-12G-P		140,000	
RCTRS-36G-N	36" Griddle	102,000	615/279
RCTRS-36G-P		102,000	

>> **EFI Product Feature:** Shipping specifications are approximate. Units given in pounds or inches.



Specifications subject to change without notice.

48" Ranges



48" Ranges

Features

- Stainless steel front, back, sides, kick plate including back guard and high shelf
- Heavy duty lift-off cast iron burners rated at 25,000 BTU/hr
- 12" x 12" cast iron top grates
- 3/4" thick polished steel griddle plate on applicable models
- Grease trough on griddle models
- Oven size is 20 x 26 x 14"
- Oven burner rated at 27,000 BTU/hr
- Oven pilot with 100% safety shut off
- Stainless steel oven burners and pilots
- Multiple position oven rack guides
- One chrome rack per oven.
- Additional racks available
- Manifold operating pressure
- 5" WC/ 11mbar natural gas
- 10" WC/ 25mbar propane

Product Information :

- Optional casters and oven racks available
- One year limited warranty parts and labor

>> **EFI Product Feature:** Shipping specifications are approximate. Units given in pounds or inches.



Specifications subject to change without notice.



Prep & Cooking Equipment

48" Ranges

Specifications

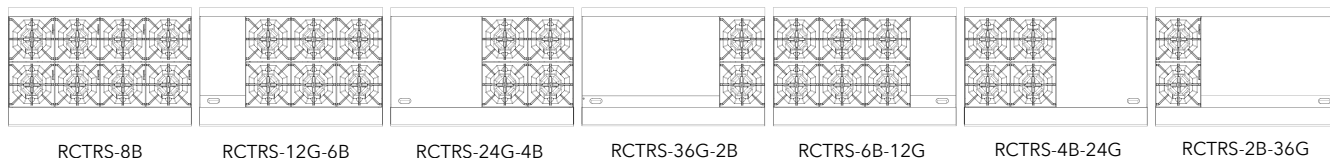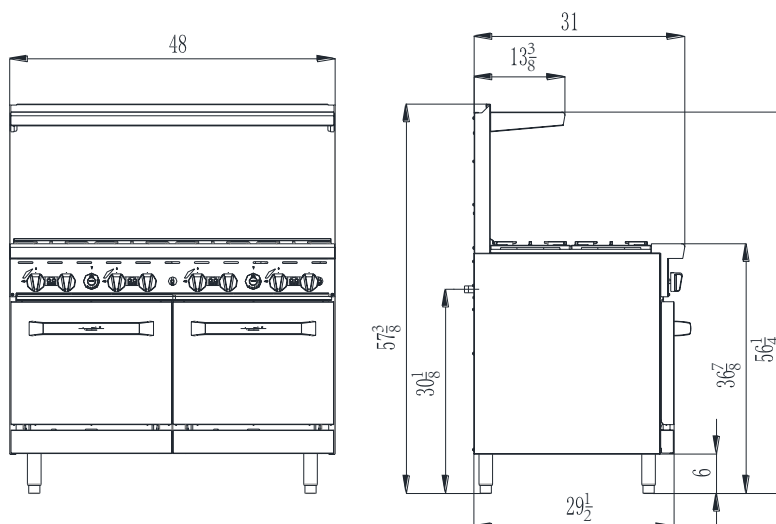

Model	Description	Total B.T.U./h	Shipping Weight lb/kg
RCTRS-8B-N	8 Burners	248,000	719/327
RCTRS-8B-P		232,000	
RCTRS-12G-6B-N	12" Griddle and 6 Burners	219,000	757/344
RCTRS-12G-6B-P		207,000	
RCTRS-24G-4B-N	24" Griddle and 4 Burners	196,000	783/356
RCTRS-24G-4B-P		188,000	
RCTRS-36G-2B-N	36" Griddle and 2 Burners	173,000	810/368
RCTRS-36G-2B-P		169,000	
RCTRS-6B-12G-N	6 Burners and 12" Griddle	219,000	757/344
RCTRS-6B-12G-P		207,000	
RCTRS-4B-24G-N	4 Burners and 24" Griddle	196,000	783/356
RCTRS-4B-24G-P		188,000	
RCTRS-2B-36G-N	2 Burners and 36" Griddle	173,000	810/368
RCTRS-2B-36G-P		169,000	

60" Ranges



60" Ranges

Features

- Stainless steel front, back, sides, kick plate including back guard and high shelf
- Heavy duty lift-off cast iron burners rated at 25,000 BTU/hr
- 12" x 12" cast iron top grates
- ¾" thick polished steel griddle plate on applicable models
- Grease trough on griddle models
- Oven size is 26 ½ x 26 x 14"
- Oven burner rated at 27,000 BTU/hr
- Oven pilot with 100% safety shut off
- Stainless steel oven burners and pilots
- Multiple position oven rack guides
- One chrome rack per oven.
- Additional racks available
- Manifold operating pressure
- 5" WC/ 11mbar natural gas
- 10" WC/ 25mbar propane

Product Information :

- Optional casters and oven racks available
- One year limited warranty parts and labor

>> **EFI Product Feature:** Shipping specifications are approximate. Units given in pounds or inches.




Specifications subject to change without notice.



Prep & Cooking Equipment

60" Ranges


Specifications

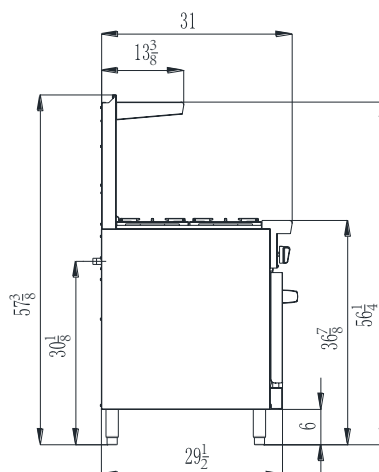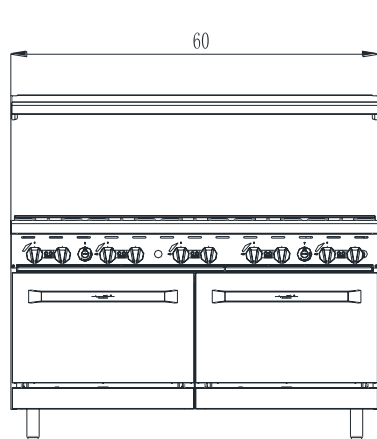

RCTRS-10B RCTRS-12G-8B RCTRS-24G-6B



RCTRS-36G-4B RCTRS-48G-2B RCTRS-8B-12G



RCTRS-6B-24G RCTRS-4B-36G RCTRS-2B-48G

Model	Description	Total B.T.U./h	Shipping Weight lb/kg
RCTRS-10B-N	10 Burners	304,000	836/380
RCTRS-10B-P		284,000	
RCTRS-12G-8B-N	12" Griddle and 8 Burners	275,000	895/407
RCTRS-12G-8B-P		259,000	
RCTRS-24G-6B-N	24" Griddle and 6 Burners	252,000	898/408
RCTRS-24G-6B-P		240,000	
RCTRS-36G-4B-N	36" Griddle and 4 Burners	229,000	915/416
RCTRS-36G-4B-P		221,000	
RCTRS-48G-2B-N	48" Griddle and 2 Burners	206,000	946/430
RCTRS-48G-2B-P		202,000	
RCTRS-8B-12G-N	8 Burners and 12" Griddle	275,000	895/407
RCTRS-8B-12G-P		259,000	
RCTRS-6B-24G-N	6 Burners and 24" Griddle	252,000	898/408
RCTRS-6B-24G-P		240,000	
RCTRS-4B-36G-N	4 Burners and 36" Griddle	229,000	915/416
RCTRS-4B-36G-P		221,000	
RCTRS-2B-48G-N	2 Burners and 48" Griddle	206,000	946/430
RCTRS-2B-48G-P		202,000	



Specifications subject to change without notice.