


SAFETY



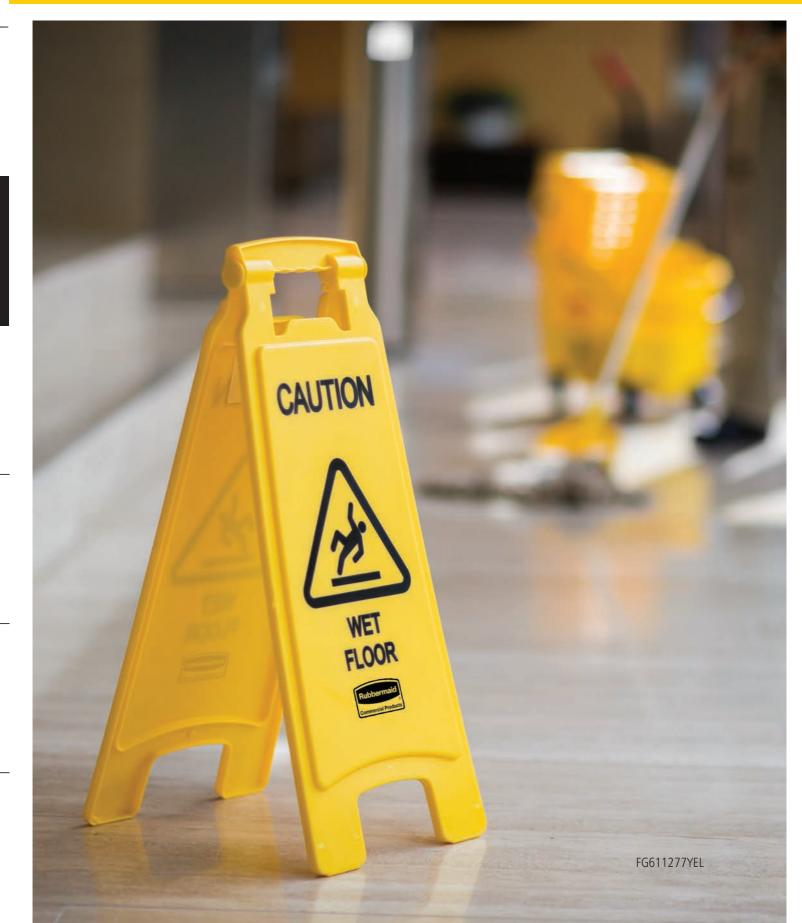

SΔ	FF1	ľ	SI	GI	VS.

Stable Safety Signs1	38
Floor Safety Signs1	38
Executive Wooden Multilingual	
Caution Signs1	39
Site Safety Hanging Signs1	39
SAFETY CONES	
Pop-Up Safety Cones1	39
Safety Cones and Accessories1	40
BARRIERS	
Mobile Barrier1	40
ABSORBENTS	
Over-the-Spill® System	41

LOOK FOR THE SPECIALLY MARKED EXECUTIVE SERIES™ PRODUCTS.

138 Safety Signs SAFETY

Stable Safety Signs

Unique "no tip" design and bold graphics quickly capture pedestrian attention.

- · Folds for convenient storage and transport on Janitor Cart (FG617388) or Rim Caddy (FG9W8700)
- · Large, 13" warning triangle with bold graphics
- · Only 11/2" thick when closed
- · Self-opening feet provide a wide, stable base
- · Low center of gravity helps prevent tipping when bumped, kicked, or windblown
- · ANSI- and OSHA-compliant color and graphics*



NO.	COLOR	DESCRIPTION	U.S. DIMENSIONS	U.S. SHIP WT/CTN	METRIC DIMENSIONS	METRIC SHIP WT/CTN	PACK
FG9S09DP	YEL	Stable Safety Sign with "Caution" Imprint, English, Spanish, French	Open: 26.0" l x 13.0" w x 13.3" d Closed: 32.3" l x 13.0" w x 1.5" d	9.5 lb	Open: 66.0 cm x 33.0 cm x 33.6 cm Closed: 81.9 cm x 33.0 cm x 3.8 cm	4.3 kg	6

^{*}ANSI Z535.3-2002 Criteria for Safety Symbols; ANSI Z535-Safety Color; OSHA 1910.144-Safety Color; OSHA 1910.145-Specification for Accident Prevention Signage

Floor Safety Signs

Lightweight, versatile signs for effective safety communication.

- "Closed" and "Caution" warning messages imprinted in English, French, and Spanish
- Folds for convenient storage and transport on janitorial carts or Rim Caddy (FG9W8700)
- · Two- and four-sided models available
- · ANSI- and OSHA-compliant color* and graphics**







	NO.	COLOR	DESCRIPTION	U.S. DIMENSIONS	U.S. SHIP WT/CTN	METRIC DIMENSIONS	METRIC SHIP WT/CTN	PACK
	FG611200***	YEL	Floor Sign with Multilingual "Caution" Imprint, 2-Sided	Open: 26.0" l x 11.0" w x 25.0" h Closed: 26.0" l x 11.0" w	15.0 lb	Open: 66.0 cm x 27.9 cm x 63.5 cm Closed: 66.0 cm x 27.9 cm	6.8 kg	6
(3)	1867505*	BLACK	Executive Multilingual Caution Sign, 2-Sided, Black	Open: 26.0" l x 11.0" w x 25.0" h Closed: 26.0" l x 11.0" w	15.0 lb	Open: 66.0 cm x 27.9 cm x 63.5 cm Closed: 66.0 cm x 27.9 cm	6.8 kg	6
	FG611277	YEL	Floor Sign with "Caution Wet Floor" Imprint, 2-Sided	Open: 26.0" l x 11.0" w x 25.0" h Closed: 26.0" l x 11.0" w	15.0 lb	Open: 66.0 cm x 27.9 cm x 63.5 cm Closed: 66.0 cm x 27.9 cm	6.8 kg	6
	FG611278	YEL	Floor Sign with Multilingual "Closed" Imprint, 2-sided	Open: 26.0" l x 11.0" w x 25.0" h Closed: 26.0" l x 11.0" w	15.0 lb	Open: 66.0 cm x 27.9 cm x 63.5 cm Closed: 66.0 cm x 27.9 cm	6.8 kg	6
	FG611400	YEL	Floor Sign with Multilingual "Caution" Imprint, 4-Sided	Open: 38.0" l x 12.0" w x 37.0" h Closed: 38.0" l x 12.0" w	26.9 lb	Open: 96.5 cm x 30.5 cm x 94.0 cm Closed: 96.5 cm x 30.5 cm	12.2 kg	6
	FG611477	YEL	Floor Sign with "Caution Wet Floor" Imprint, 4-Sided	Open: 38.0" x 12.0" w x 37.0" h Closed: 38.0" x 12.0" w	26.9 lb	Open: 96.5 cm x 30.5 cm x 94.0 cm Closed: 96.5 cm x 30.5 cm	12.2 kg	6

^{*}Applies to yellow signs only. Executive Series or gray and black Caution Signs are NOT compliant with OSHA nor ANSI color or graphics. FG611278 and FG611478 are NOT compliant with OSHA nor ANSI graphics.

^{**}ANSI Z535.3-2002 Criteria for Safety Symbols; ANSI Z535-Safety Color; OSHA 1910.144-Safety Color; OSHA 1910.145-Specification for Accident Prevention Signage.

 $[\]hbox{\ensuremath{}^{***}} \hbox{Custom imprinting available; contact Rubbermaid Customer Service for details.}$

UTILITY REFUSE AND RECYCLING

Executive Wooden Multilingual Caution Signs

2-sided hinged Caution signs.

- · Elegant dark hardwood frame
- · Durable plastic feet help protect wood finish from spills
- · Hinged top with integrated carry handle for easy transport and storage
- · Available in gold or silver
- · Trilingual Caution plate





Safety Signs



1867507

	NO.	COLOR	DESCRIPTION	U.S. DIMENSIONS	U.S. SHIP WT/CTN	METRIC DIMENSIONS	METRIC SHIP WT/CTN	PACK
₿	1867507	GOLD	Executive Wooden Multilingual Caution Sign, 2-Sided, Gold	Open: 22.0" x 15.1" w x 20.0" d Closed: 23.8" x 15.1" w x 2.3" d	13.5 lb	Open: 55.9 cm x 38.4 cm x 50.8 cm Closed: 60.3 cm x 38.4 cm x 5.7 cm	6.2 kg	1
(3)	1867508	SILVER	Executive Wooden Multilingual Caution Sign, 2-Sided, Silver	Open: 22.0" x 15.1" w x 20.0" d Closed: 23.8" x 15.1" w x 2.3" d	13.5 lb	Open: 55.9 cm x 38.4 cm x 50.8 cm Closed: 60.3 cm x 38.4 cm x 5.7 cm	6.2 kg	1

Site Safety Hanging Signs

Sign and pole combination for blocking doorways and entrances.

- Twisting action secures pole in doorways up to 50" wide to prohibit entry
- · Soft, pliable sign rolls around pole for easy storage
- · ANSI- and OSHA-compliant color



FG9S1600

NO.	COLOR	DESCRIPTION	U.S. DIMENSIONS	U.S. SHIP WT/CTN	METRIC DIMENSIONS	METRIC SHIP WT/CTN	PACK
FG9S1500	YEL	Site Safety Hanging Sign with "Closed for Cleaning" Imprint — English Only	Closed: 13.0" h x 28.0" w x 1.0" d Open: 13.0" h x 50.3" w x 1.0" d	5.5 lb	33.0 cm x 71.12 cm x 2.5 cm 33.0 cm x 127.6 cm x 2.5 cm	2.5 kg	6
FG9S1600	YEL	Site Safety Hanging Sign with Multilingual "Closed for Cleaning" Imprint	Closed: 13.0" h x 27.8" w x 1.0" d	5.5 lb	33.0 cm x 70.5 cm x 2.5 cm	2.5 kg	6

Pop-Up Safety Cones

Collapsible, automatically deployable cone.

- · Durable cone material withstands rough handling
- · Wall-mounted, shatterproof storage tube provides easy and compact storage
- · Storage tube mounting hardware includes tape and screws
- · ANSI- and OSHA-compliant color* and graphics**



NO.	COLOR	DESCRIPTION	U.S. DIMENSIONS	U.S. SHIP WT/CTN	METRIC DIMENSIONS	METRIC SHIP WT/CTN	PACK
FG9S0000	YEL	Pop-Up Safety Cone, 20" (50.8 cm) with Multilingual "Caution" Imprint and Wet Floor Symbol	21.0" dia x 21.0" w x 20.0" h	12.7 lb	53.3 cm dia x 53.3 cm x 50.8 cm	5.8 kg	12
FG9S0100	YEL	Pop-Up Safety Cone, 30" (76.2 cm) with Multilingual "Caution" Imprint and Wet Floor Symbol	21.0" dia x 21.0" w x 30.0" h	23.5 lb	53.3 cm dia x 53.3 cm x 76.2 cm	10.7 kg	12



140 Safety Cones SAFETY

Safety Cones and Accessories

Highly visible, bright yellow hazard protection system.

- · Versatile top design accommodates barricade belt, flashing light, lock-in sign holder, and Audio Guard® accessories
- · Four-sided shape for efficient stacking
- Multilingual imprinted warning messages provide effective communication with broad audiences
- · Molded-in slots for easy handling
- · Can be used with BRUTE® Square Dolly (FG353000) for easy transport
- · ANSI- and OSHA-compliant color*



			U.S.	U.S. SHIP	METRIC	METRIC SHIP	
NO.	COLOR	DESCRIPTION	DIMENSIONS	WT/CTN	DIMENSIONS	WT/CTN	PACK
FG353000	BLA	BRUTE® Square Dolly	17.3" sq x 6.3" h	18.5 lb	43.8 cm sq x 15.9 cm	8.4 kg	2
FG627600***	YEL	Safety Cone 36" (91.4 cm) with Multilingual "Caution" Imprint	12.2 l x 12.3" w x 36.0" h	17.6 lb	31.1 cm x 31.1 cm x 91.4 cm	8.0 kg	5
FG627677	YEL	Safety Cone 36" (91.4 cm) with Multilingual "Caution Wet Floor" Imprint	12.3" l x 12.3" w x 36.0" h	17.6 lb	31.1 cm x 31.1 cm x 91.4 cm	8.0 kg	5
FG627777	YEL	Safety Cone 25.8" (65.4 cm) with Multilingual "Caution Wet Floor" Imprint	10.5" l x 10.5" w x 25.8" h	14.0 lb	26.7 cm x 26.7 cm x 65.4 cm	6.4 kg	6
FG628400	BLA	Weight Ring — Single for all 36.0" (91.4 cm) Safety Cones	12.5" l x 12.5" w x 1.0" h	10.0 lb	31.8 cm x 31.8 cm x 2.5 cm	4.5 ka	1

Mobile Barrier

Easy to use, highly visible mobile barrier for use in many situations.

- · Flexible panels allow straight, curved, and circular configurations
- Extends to 13' when fully opened; locking straps keep barrier closed when not in use
- · Lightweight and compact (2' x 13" footprint when closed)
- · ANSI- and OSHA-compliant color*
- · For indoor use; shipped assembled

Work around electrical equipment?

Excerpt from OSHA reg. 29 CFR 1910.335 (b)(2): "Barricades shall be used...to prevent or limit employee access to work areas...Conductive [metal] barricades may not be used where they might cause an electrical contact hazard."



NO.	COLOR	DESCRIPTION	U.S. DIMENSIONS	U.S. SHIP WT/CTN	METRIC DIMENSIONS	METRIC SHIP WT/CTN	PACK
FG9S1100	YEL	Mobile Barrier	Open: 40.0" h x 13.0' l x 1.0" w Closed: 40.0" h x 2.0' l x 13.0" w	37.0 lb	Open: 101.6 cm x 396.0 cm x 2.5 cm Closed: 101.6 cm x 61.0 cm x 33.0 cm	16.8 kg	1

^{*}Applies to yellow signs only.

^{**}ANSI Z535.3—2002 Criteria for Safety Symbols; ANSI Z535—Safety Color; OSHA 1910.144—Safety Color; OSHA 1910.145—Specification for Accident Prevention Signage.

^{***}Custom imprinting available; contact Rubbermaid Customer Service for details.

Spills happen unexpectedly, creating hazards for patrons and staff which need to be cleaned up as quickly as possible to avoid injuries. Using a string mop and bucket can be time-consuming and leaves the floor wet. Over-the-Spill Pads make it easier to cover and absorb spills while simultaneously alerting pedestrians to potential slip-and-fall hazards.



¹ Bureau of Labor Statistics (BLS)

Over-the-Spill® System

Slip-resistant pads quickly cover spills and alert pedestrians.

- Each yellow pad is coded with universal caution symbol and "Caution Wet Floor" message in English and Spanish
- $\boldsymbol{\cdot}$ Dispensing station mounts on flat surfaces
- · Pads absorb up to 14oz of liquid for faster cleanup





NO.	COLOR	DESCRIPTION	U.S. DIMENSIONS	U.S. SHIP WT/CTN	METRIC DIMENSIONS	METRIC SHIP WT/CTN	PACK
FG425100	YEL	Over-the-Spill® Station Kit includes Pad Dispenser, 22 Large Pads, and Fasteners	21.0" l x 17.8" w	14.0 lb	53.3 cm x 45.1 cm	6.4 kg	6
FG425200	YEL	Over-the-Spill® Station Pads, Large; Refill Pads for FG425100, Contains 22 Pads	20.0" l x 16.5" w	25.0 lb	50.8 cm x 41.9 cm	11.3 kg	12
FG425300	YEL	Over-the-Spill® Station Pads, Medium; Refill Pads for FG425100, Contains 22 Pads	16.5" l x 14.0" w	17.0 lb	41.9 cm x 35.6 cm	7.7 kg	12
FG425400	YEL	Over-the-Spill® Pad Tablet, Contains 22 Pads	16.5" l x 14.0" w	20.0 lb	41.9 cm x 35.6 cm	9.1 kg	12

^{*}Applies to yellow signs only.



² Currie L. Fall and Injury Prevention. In: Hughes RG, editor. Patient Safety and Quality: An Evidence-Based Handbook for Nurses. Rockville (MD): Agency for Healthcare Research and Quality (US); 2008 Apr. Chapter 10. Available from: https://www.ncbi.nlm.nih.gov/books/NBK2653/