

BAR EQUIPMENT



Back Bar Coolers

Back Bar Coolers with Glass Doors

Horizontal Bottle Coolers

Direct Draw Keg Coolers



"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

Back Bar Coolers

MODELS:

MBB48GR / MBB59GR / MBB69GR / MBB90GR

Standard Features

- Stainless steel exterior & interior
- Dixell digital controller
- Maintains temperatures between 33°F– 40°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- Recessed door handle(s)
- Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters



MBB48GR



MBB59GR



MBB90GR



MBB69GR

For the best results of food preservation we recommend setting your refrigerator between 33 °F - 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MBB48GR	2	12.9	4	2	2.3	115/60/1	1/7	R290	48×28 ^{1/10} ×40 ^{1/10}	192	240
MBB59GR	2	17.3	4	2	2.3	115/60/1	1/7	R290	57 ^{4/5} ×28 ^{1/10} ×40 ^{1/10}	214	262
MBB69GR	2	21.5	4	2	2.3	115/60/1	1/7	R290	68×28 ^{1/10} ×40 ^{1/10}	238	295
MBB90GR	3	30.1	6	2	2.8	115/60/1	1/5	R290	89 ^{3/10} ×28 ^{1/10} ×40 ^{1/10}	295	370

PLAN VIEW


MBB48GR









MBB59GR



MBB69GR



MBB90GR

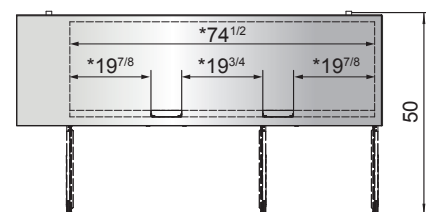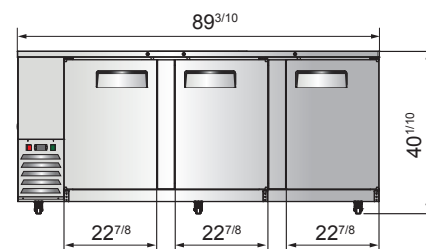

*Interior Dimensions

Epoxy shelves



Door lock



Temperature control



Recessed handles



NEMA 5-15P



NEMA
15A/125V



"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

Back Bar Coolers With Glass Doors

Standard Features

- Stainless steel exterior & interior
- Dixell digital controller
- Maintains temperatures between 33°F – 40°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- LED Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters

MODELS:

MBB48G-GR / MBB59G-GR
MBB69G-GR / MBB90G-GR



MBB48G-GR



MBB59G-GR



MBB90G-GR



MBB69G-GR

For the best results of food preservation we recommend setting your refrigerator between 33 °F - 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MBB48G-GR	2	12.9	4	2	2.3	115/60/1	1/7	R290	48×28 ^{1/10} ×40 ^{1/10}	214	262
MBB59G-GR	2	17.3	4	2	2.3	115/60/1	1/7	R290	57 ^{4/5} ×28 ^{1/10} ×40 ^{1/10}	236	284
MBB69G-GR	2	21.5	4	2	2.3	115/60/1	1/7	R290	68×28 ^{1/10} ×40 ^{1/10}	260	317
MBB90G-GR	3	30.1	6	2	2.8	115/60/1	1/5	R290	89 ^{3/10} ×28 ^{1/10} ×40 ^{1/10}	317	392

PLAN VIEW


MBB48G-GR









MBB59G-GR



MBB69G-GR



MBB90G-GR

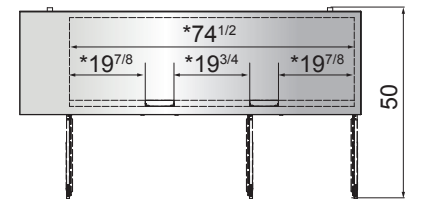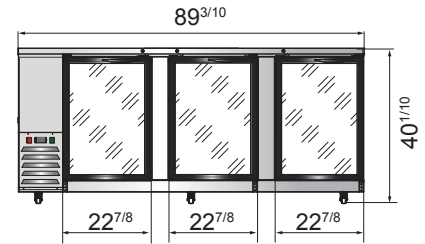

*Interior Dimensions

Epoxy shelves



Door lock



Temperature control



NEMA 5-15P



NEMA
15A/125V



"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

Horizontal Bottle Coolers

Standard Features

- Stainless steel exterior & interior
- Dixell digital controller
- Maintains temperatures between 33°F – 40°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- Easy glide stainless steel lid(s) with handle(s)
- Lid lock(s) standard
- Bottle opener & cap catcher standard
- Wire dividers standard
- Pre-installed casters

MODELS:

MBC50GR / MBC65GR / MBC80GR



MBC50GR



MBC65GR



MBC80GR

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Capacity (Cu.Ft.)	Wire dividers	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MBC50GR	11.7	3	2	2.3	115/60/1	1/7	R290	49 ^{2/5} ×27 ^{4/5} ×36 ^{3/5}	176	236
MBC65GR	16.4	4	2	2.3	115/60/1	1/7	R290	64 ^{4/5} ×27 ^{4/5} ×36 ^{3/5}	205	278
MBC80GR	21.2	5	2	2.8	115/60/1	1/5	R290	80 ^{1/2} ×27 ^{4/5} ×36 ^{3/5}	251	344


PLAN VIEW

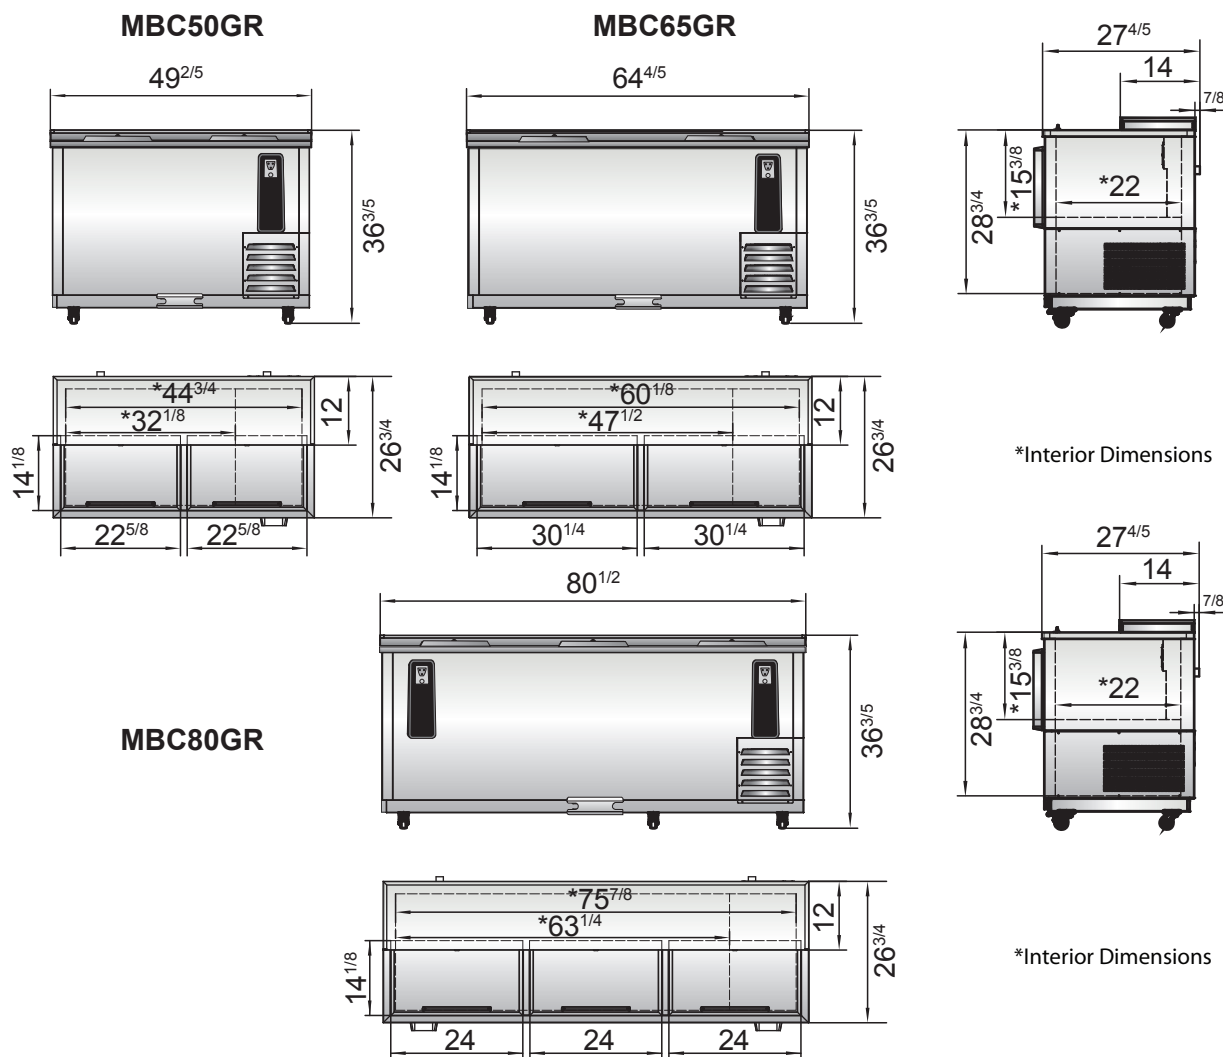

Stainless steel lids

Bottle opener and cap catcher

Wire dividers





"WE MAKE THE KITCHEN BETTER!"

Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

Direct Draw Keg Coolers

Standard Features

- Stainless steel exterior & interior
- Dixell digital controller
- Maintains temperatures between 33°F – 40°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- Stainless steel drip tray(s)
- Recessed door handle(s)
- Dual tap tower(s) standard
- Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Manifold and ball taps included
- Door lock(s) standard
- Pre-installed casters

Model#	Sixth Barrel	Quarter Barrel	Slim Quarter	Half Barrel
MKC23GR				1
MKC23GR	2			
MKC23GR		1		
MKC58GR	1			2
MKC58GR	4			
MKC58GR	1	2		
MKC58GR	1		3	
MKC68GR				3
MKC68GR	6			
MKC68GR		3		
MKC68GR	1		4	
MKC90GR	1			4
MKC90GR	8			
MKC90GR	1	4		
MKC90GR			6	

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

MODELS:

MKC23GR / MKC58GR / MKC68GR / MKC90GR



MKC23GR



MKC58GR



MKC68GR



MKC90GR



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





"WE MAKE THE KITCHEN BETTER!"


Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
 California, Colorado, Florida, Georgia, Illinois,
 Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MKC23GR	1	7.1	2	2.3	115/60/1	1/7	R290	23×31 ^{1/10} ×39 ^{3/10}	132	188
MKC58GR	2	17.3	2	2.3	115/60/1	1/7	R290	57 ^{4/5} ×28 ^{1/10} ×40 ^{1/10}	209	243
MKC68GR	2	21.5	2	2.3	115/60/1	1/7	R290	68×28 ^{1/10} ×40 ^{1/10}	234	291
MKC90GR	3	30.1	2	2.8	115/60/1	1/5	R290	89 ^{3/10} ×28 ^{1/10} ×40 ^{1/10}	282	357

PLAN VIEW


MKC23GR

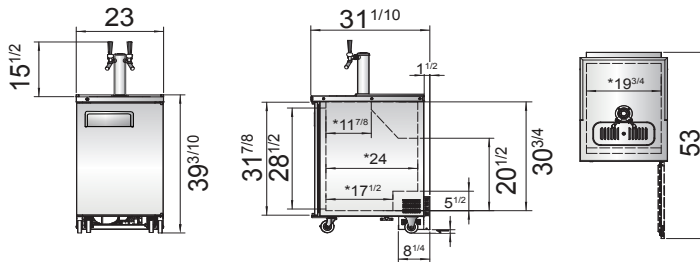



MKC58GR

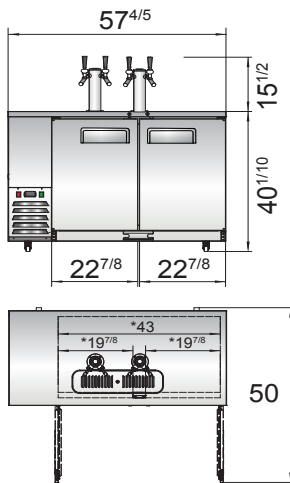

MKC68GR

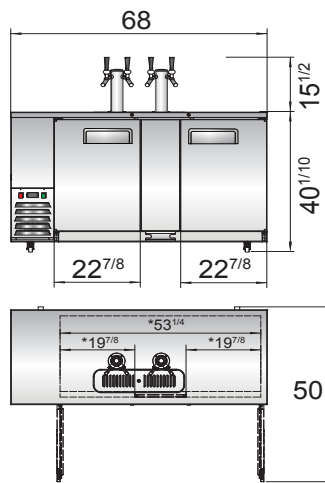

MKC90GR

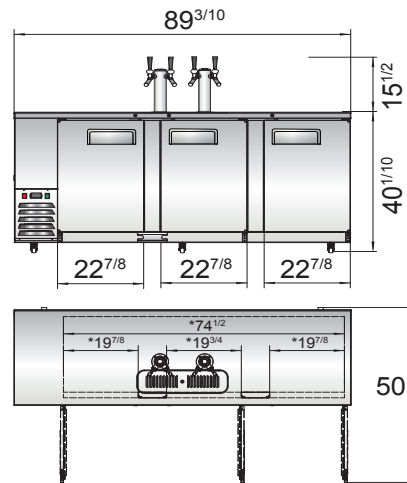

Dual tap towers

Stainless steel drip tray

Manifold and ball taps

