GLRSS DOOR MERCHANDISERS



Countertop Glassdoor Merchandisers

Countertop Refrigerated Display Cases - Curved/Square

Black Exterior Glass Door Refrigerator Merchandisers



Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

MODELS:

CTD-3 / CTD-3S / CTD-5

Countertop Glassdoor **Merchandisers**

Standard Features

- Black exterior cabinet with black door frame and white interior
- Environmentally friendly R600a refrigerant
- CTD-3/CTD-5 are forced air cooling and CTD-3S is cold wall cooling
- Foamed-in-place high density polyurethane insulation
- Double pane glass door with recessed door handle
- Door lock standard
- Mechanical controller
- Pre-installed removable PVC coated wire shelves standard
- Certified for packaged foods and bottled beverages
- Maintains temperatures between 33°F-41°F
- Magnetic door gasket standard for positive
- LED interior lighting
- Leveling legs
- 5' cord with NEMA 5-15 plug standard



For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38 °F

- 1. Don't forget to leave the unit some room to breathe!
- 2. Please clean the condenser frequently to give the unit more fresh air.





1 YEAR PARTS AND LABOR WARRANTY (US ONLY) 5 YEAR COMPRESSOR PART WARRANTY (US ONLY)









CTD-5












Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Amps(A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
CTD-3	1	2.4	3	1.5	115/60/1	1/10	R600a	$17^{1/4} \times 19^{3/4} \times 27^{1/2}$	53	57
CTD-3S	1	2.4	3	1.5	115/60/1	1/8	R600a	$18^{1/8} \times 18^{1/2} \times 33$	64	70
CTD-5	1	4.6	4	1.7	115/60/1	1/8	R600a	21 ^{1/4} ×22×33 ^{3/4}	88	95

PLAN VIEW

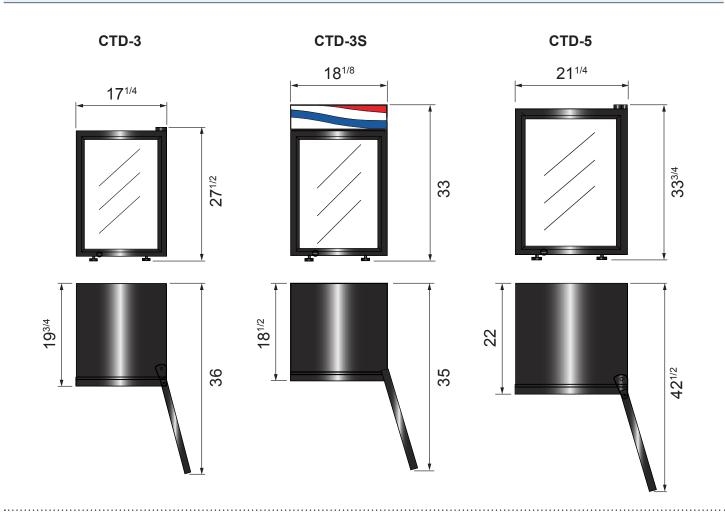







Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

MODELS:

CRDC-35 / CRDC-46 / CRDS-42 / CRDS-56

Countertop Refrigerated Display Cases - Curved / Square

Standard Features

- Stainless steel exterior & interior with black frames
- Rear mount compressor with environmentally friendly R290 refrigerant
- Dixell digital controller
- Two(2) stainless steel shelves standard
- Defog feature to ensure the glass stays clear
- Maintains temperatures between 33°F 41°F
- Magnetic door gasket(s) standard for positive door seal
- Two(2) rear sliding doors
- LED interior lighting
- Leveling legs
- NEMA 5-15 plug



CRDS-56

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38°F

- 1. Don't forget to leave the unit some room to breathe!
- 2. Please clean the condenser frequently to give the unit more fresh air.



CRDC-35



CRDC-46



CRDS-42













Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Amps(A)	Voltage (V/Hz/Ph)	НР	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
CRDC-35	2	3.5	2	2	115/60/1	1/5	R290	$27^{3/5} \times 22^{1/10} \times 26^{2/5}$	139	172
CRDC-46	2	4.6	2	2	115/60/1	1/5	R290	$35^{2/5} \times 22^{1/10} \times 26^{2/5}$	154	200
CRDS-42	2	4.2	2	2	115/60/1	1/5	R290	27 ^{3/5} ×22 ^{1/10} ×26 ^{2/5}	143	192
CRDS-56	2	5.6	2	2	115/60/1	1/5	R290	$35^{2/5} \times 22^{1/10} \times 26^{2/5}$	165	214

PLAN VIEW



LED lights







Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

MODELS:

MCF8725GR

Black Exterior Glass Door Refrigerator Merchandiser

Standard Features

- · Black steel exterior with stainless steel interior
- Lighted header panel
- LED interior lighting standard
- Dixell electronic controller
- · Four(4) shelves standard per section
- Double pane glass door
- Self-closing door(s) with automatic stay open feature
- · Recessed door handle
- Door lock(s) standard
- · Magnetic door gasket
- Self-contained bottom mount refrigeration system with environmentally friendly R290 refrigerant
- Pre-installed casters
- Pre-installed shelves
- NEMA-5-15P plug standard

Optional Accessories

Extra shelves – includes 4 shelf clips per shelf



For the best results of food preservation we recommend setting your refrigerator between 33 $^{\circ}F$ - 38 $^{\circ}F$

- 1. Don't forget to leave the unit some room to breathe!
- 2. Please clean the condenser frequently to give the unit more fresh air.
















Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MCF8725GR	1	11.1	4	2	2.1	115/60/1	1/7	R290	$24^{1/5} \times 24 \times 76^{1/5}$	227	251

PLAN VIEW



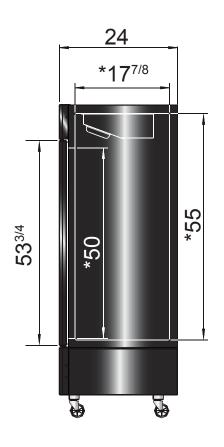



SELF-CLOSING AND STAY OPEN DOOR FEATURE

Casters Temperature control Door lock LED lights Epoxy shelves





Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

MODELS:

MCF8722GR / MCF8723GR / MCF8724GR

MCF8722GR



MCF8723GR



MCF8724GR











Black Exterior Glass Door Refrigerator Merchandisers

Standard Features

- · Black steel exterior with stainless steel interior
- Lighted header panel
- LED interior lighting standard
- Dixell electronic controller
- · Four(4) shelves standard per section
- Double pane glass door(s)
- Self-closing door(s) with automatic stay open feature
- · Recessed door handle
- Door lock(s) standard
- · Magnetic door gasket
- Self-contained bottom mount refrigeration system with environmentally friendly R290 refrigerant
- Pre-installed casters
- Pre-installed shelves
- NEMA-5-15P plug standard

Optional Accessories

Extra shelves – includes 4 shelf clips per shelf



MCF8722GR MCF8723GR

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38 °F

- 1. Don't forget to leave the unit some room to breathe!
- 2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY) 5 YEAR COMPRESSOR PART WARRANTY (US ONLY)



Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MCF8722GR	1	19.4	4	2	2.1	115/60/1	1/7	R290	27×31 ^{1/2} ×81 ^{1/5}	293	326
MCF8723GR	2	43.8	8	2	3.2	115/60/1	1/5	R290	54 ^{2/5} ×31 ^{1/2} ×81 ^{1/5}	485	540
MCF8724GR	3	69.5	12	2	4.2	115/60/1	1/4	R290	81 ^{9/10} ×31 ^{1/2} ×81 ^{1/5}	653	761

PLAN VIEW

