

HORIZON[®] SERIES

Heavy Duty Construction

2" CFC and HCFC-free foamed-in place polyurethane insulation

Full electronic Control

with one-touch defrost

Multiple finish options

Door locks standard

Solid doors only (optional on glass door models)

Field-reversible doors

Cam-lift hinges

with 120 degree stay open feature

LED lighting standard

Back rack airflow distribution system

Self-closing doors

6" heavy duty casters standard

3" casters or 6" leg option available
at no charge when specified on order

**HC models featuring environmentally friendly,
energy efficient R290 refrigerant**



**DESIGNED TO PERFORM IN
HIGH AMBIENT CONDITIONS**

**3 YEAR PARTS AND LABOR /
ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY**

MADE IN USA



BACK CHANNEL
to promote air flow



FIELD REVERSIBLE DOORS
for flexibility to get your kitchen set
up exactly how you want it

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel front with continuous coil coated sides
- Stainless steel sides/front

INTERIOR FINISHES

- Corrosion resistant aluminum
- Stainless steel

AVAILABLE ACCESSORIES

- Tray Slides
- Additional shelves

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available



HORIZON® SERIES

REFRIGERATORS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

		MODEL NUMBERS				MAINTAINS PRODUCT TEMPERATURES OF 36-38 °F								
MODEL WIDTH	DOOR TYPE	STANDARD FINISH	FINISH P	FINISH S	FINISH PS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	HR1HC-1S	HRP1HC-1S	HRS1HC-1S	HRPS1HC-1S	1/3	115	1/4	2.7	21.17	26	33.63	78.5	326
	HALF SOLID	HR1HC-1HS	HRP1HC-1HS	HRS1HC-1HS	HRPS1HC-1HS	2/3								324
	GLASS	HR1HC-1G	HRP1HC-1G	HRS1HC-1G	HRPS1HC-1G	1/3	115	1/4	2.7	22.28				429
	HALF GLASS	HR1HC-1HG	HRP1HC-1HG	HRS1HC-1HG	HRPS1HC-1HG	2/3								356
35" 1 WIDE SECTION	SOLID	HR1WHC-1S	HRP1WHC-1S	HRS1WHC-1S	HRPS1WHC-1S	1/3	115	1/4	2.7	30.76	35	33.63	78.5	418
	GLASS	HR1WHC-1G	HRP1WHC-1G	HRS1WHC-1G	HRPS1WHC-1G									429
52" 2 SECTIONS	SOLID	HR2HC-1S	HRP2HC-1S	HRS2HC-1S	HRPS2HC-1S	2/6	115	1/3	6	46.88	52	33.63	78.5	506
	HALF SOLID	HR2HC-1HS	HRP2HC-1HS	HRS2HC-1HS	HRPS2HC-1HS	4/6								543
	GLASS	HR2HC-1G	HRP2HC-1G	HRS2HC-1G	HRPS2HC-1G	2/6								571
	HALF GLASS	HR2HC-1HG	HRP2HC-1HG	HRS2HC-1HG	HRPS2HC-1HG	4/6								543
78" 3 SECTIONS	SOLID	HR3HC-1S	HRP3HC-1S	HRS3HC-1S	HRPS3HC-1S	3/9	115	1/3	6	71.52	78	33.63	78.5	791
	HALF SOLID	HR3HC-1HS	HRP3HC-1HS	HRS3HC-1HS	HRPS3HC-1HS	6/9								791
	GLASS	HR3HC-1G	HRP3HC-1G	HRS3HC-1G	HRPS3HC-1G	3/9								737
	HALF GLASS	HR3HC-1HG	HRP3HC-1HG	HRS3HC-1HG	HRPS3HC-1HG	6/9								791

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

FINISH OPTIONS REFRIGERATOR & FREEZER		
SUFFIX	EXTERIOR	INTERIOR
(standard)	Stainless steel front with continuous coil coated sides	Corrosion resistant aluminum
P	Stainless steel front with stainless steel sides	Corrosion resistant aluminum
S	Stainless steel front with continuous coil coated sides	Stainless steel
PS	Stainless steel front with stainless steel sides	Stainless steel

AVAILABLE OPTIONS	
SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: HR2-1S-18	

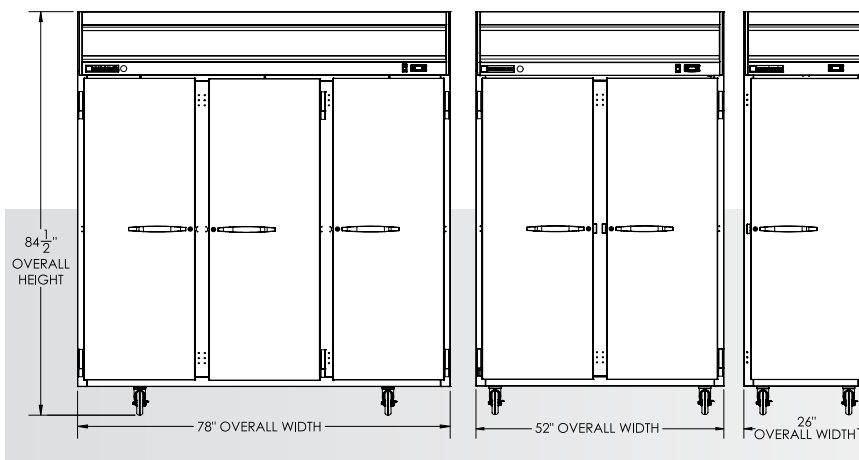

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

FREEZERS


MAINTAINS PRODUCT TEMPERATURES OF -10°F

		MODEL NUMBERS												
MODEL WIDTH	DOOR TYPE	STANDARD FINISH	FINISH P	FINISH S	FINISH PS	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	HF1HC-1S	HFP1HC-1S	HFS1HC-1S	HFPS1HC-1S	1/3	115	3/4	11	21.06	26	33.63	78.5	336
	HALF SOLID	HF1HC-1HS	HFP1HC-1HS	HFS1-1HS	HFPS1HC-1HS	2/3								340
	GLASS	HF1HC-1G	HFP1HC-1G	HFS1HC-1G	HFPS1HC-1G	1/3								368
	HALF GLASS	HF1HC-1HG	HFP1HC-1HG	HFS1HC-1HG	HFPS1HC-1HG	2/3								360
35" 1 WIDE SECTION	SOLID	HF1WHC-1S	HFP1WHC-1S	HFS1WHC-1S	HFPS1WHC-1S	1/3	115	3/4	11	30.76	35	33.63	78.5	418
52" 2 SECTIONS	SOLID	HF2HC-1S	HFP2HC-1S	HFS2HC-1S	HFPS2HC-1S	2/6	115	3/4+	10	45.2	52	33.63	78.5	568
	HALF SOLID	HF2HC-1HS	HFP2HC-1HS	HFS2HC-1HS	HFPS2HC-1HS	4/6								550
	GLASS	HF2HC-1G	HFP2HC-1G	HFS2HC-1G	HFPS2HC-1G	2/6	115	3/4 (X2)	13.2					625
	HALF GLASS	HF2HC-1HG	HFP2HC-1HG	HFS2HC-1HG	HFPS2HC-1HG	4/6								550
78" 3 SECTIONS	SOLID	HF3HC-1S	HFP3HC-1S	HFS3HC-1S	HFPS3HC-1S	3/9	115	3/4 (X2)	13.2	69	78	33.63	78.5	732
	HALF SOLID	HF3HC-1HS	HFP3HC-1HS	HFS3HC-1HS	HFPS3HC-1HS	6/9								732
	GLASS	HF3HC-1G	HFP3HC-1G	HFS3HC-1G	HFPS3HC-1G	3/9								732
	HALF GLASS	HF3HC-1HG	HFP3HC-1HG	HFS3HC-1HG	HFPS3HC-1HG	6/9								732

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

ADAPTIVE DEFROST

- Reduces energy consumption up to 15%
- Units are able to provide a consistent product temperature throughout the cabinet even during defrost cycles
- Reduces the overall time defrosting versus traditional timed defrost
- Example: Adaptive Defrost: 48 min total in 4 cycles versus 60 min in 3 cycles (Traditional 8HR)
- High Ambient and Humidity testing shows the system's ability to perform better in high usage environments under unfavorable conditions

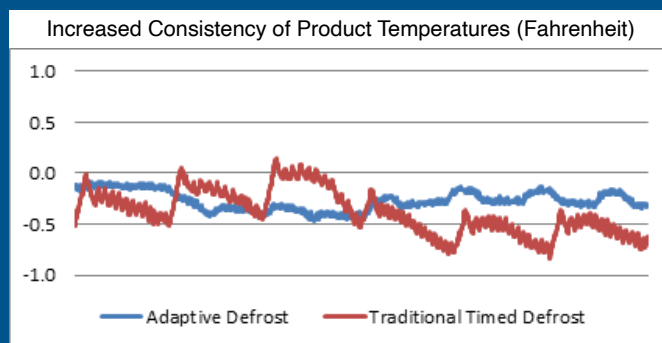

TM SERIES

NEW

**Intelligent temperature control
reduces energy consumption**

Stainless steel exterior and interior

Easy access to the refrigeration

**Uses environmentally friendly,
energy efficient R290 refrigerant, and
meets all regulatory requirements for
CARB, SNAP, DOE & more**

**Hot gas condensate evaporator
and face heater**

Electric defrost heater

Coated evaporator coil

LED lighting standard

**3 epoxy coated wire shelves
per section**



STAINLESS STEEL EXTERIOR AND INTERIOR STANDARD

**ENERGY EFFICIENT R290 PROVIDES SOLUTION
FOR ALL ENVIRONMENTAL CONCERNS**

2 YEAR PARTS AND LABOR / ADDITIONAL 5 YEAR COMPRESSOR PART WARRANTY



FANS IN FREEZER MODELS
increase the cold air flow to create
consistent temperature throughout
the unit



FANS IN COOLER MODELS
are set back and higher than the freezer
fans, accommodating more product
while holding its set temperature

AVAILABLE DOORS

- Solid (one full-door)

AGENCY CERTIFICATIONS



Refrigerators & Freezers

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	TMR1HC-1S	1/3	115	1/4	3	19	26.282	33.563	74.688	304
54" 2 SECTIONS	SOLID	TMR2HC-1S	2/6	120	1/2	5.3	40	53.969	33.563	74.688	646

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF 0°F AND BELOW.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26" 1 SECTION	SOLID	TMF1HC-1S	1/3	120	1/2	4.73	19	26.282	33.563	74.688	304
54" 2 SECTIONS	SOLID	TMF2HC-1S	2/6	120	1/2	8.3	40	53.969	33.563	74.688	646

Depth measurement includes handles. For total height, add 6 inches for casters.



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

MOUNTING OPTIONS

- 6" casters (standard)

VISTA® SERIES

NEW SIZES
ADDED

Full electronic control

Door locks standard

(solid doors only, optional on glass door models)

One piece grille

Cartridge style door hinges

with 120 degree stay-open feature

LED lighting standard

Self-closing doors

Right and left hand hinged models available

(specify at time of order)

6" heavy duty casters standard

(3" casters or 6" leg option available
at no charge when specified on order)

HC models featuring environmentally friendly, energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



DOOR LOCKS STANDARD

on solid door units for loss prevention
(available as an option for glass doors)



FULL ELECTRONIC CONTROL
with easy to read digital display

AVAILABLE DOORS

- Solid (one full-door)
- Glass (one full-door)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel front with continuous coil coated sides

INTERIOR FINISHES

- Corrosion resistant aluminum

AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available



VISTA® SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

NEW SIZES
ADDED

APPROXIMATE MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24" 1 SECTION	SOLID	RB12HC-1S	1/4	115	1/6	2	12.06	24	26	62	218
27" 1 SHALLOW SECTION	SOLID	RB19HC-1S	1/3	115	1/4	3	17.87	27.25	27.56	78	292
	GLASS	RB19HC-1G									302
27" 1 SECTION	SOLID	RB23HC-1S	1/3	115	1/4	3	23.1	27.25	33.75	78	322
	GLASS	RB23HC-1G									346
30" 1 SECTION	SOLID	RB27HC-1S	1/3	115	1/4	3	25.88	30	33.75	78	358
	GLASS	RB27HC-1G									373
40" 2 SECTION	SOLID	RB35HC-1S	2/6	115	1/4	2.4	36.87	39.5	33.75	78	428
	GLASS	RB35HC-1G									475
47" 2 SECTIONS	SOLID	RB44HC-1S	2/6	115	1/3	5.4	44	47	33.75	78	484
	GLASS	RB44HC-1G									498
52" 2 SECTIONS	SOLID	RB49HC-1S	2/6	115	1/3	5.4	46.15	52	33.75	78	536
	GLASS	RB49HC-1G									566
75" 3 SECTIONS	SOLID	RB72HC-1S	3/9	115	1/2	6.2	68.93	75	33.75	78	696
	GLASS	RB72HC-1G									712


NEW SIZE!

NEW SIZE!

NEW SIZE!

NEW SIZE!

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

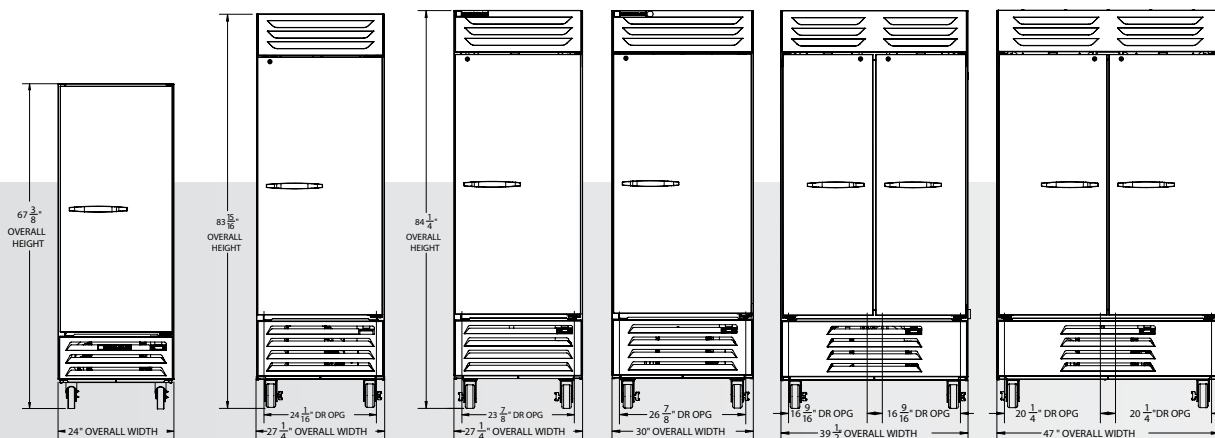

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

NEW SIZE!

NEW SIZE!


NEW SIZE!

NEW SIZE!

	APPROXIMATE MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
	24" 1 SECTION	SOLID	FB12HC-1S	1/3	115	1/2	5	11.9	24	26	62	284
	27" 1 SHALLOW SECTION	SOLID	FB19HC-1S	1/3	115	3/4	7.5	17.87	27.25	27.56	78	300
		GLASS	FB19HC-1G									310
	27" 1 SECTION	SOLID	FB23HC-1S	1/3	115	3/4	7.5	22.5	27.25	33.75	78	408
		GLASS	FB23HC-1G									432
	30" 1 SECTION	SOLID	FB27HC-1S	1/3	115	3/4	7.5	26.57	30	33.75	78	438
		GLASS	FB27HC-1G									453
	40" 2 SECTION	SOLID	FB35HC-1S	2/6	115	3/4	11	36.87	39.5	33.75	78	456
		GLASS	FB35HC-1G									503
	47" 2 SECTIONS	SOLID	FB44HC-1S	2/6	115	3/4	11	44	47	33.75	78	562
		GLASS	FB44HC-1G									588
	52" 2 SECTIONS	SOLID	FB49HC-1S	2/6	115	3/4	11	46.2	52	33.75	78	564
		GLASS	FB49HC-1G									594
	75" 3 SECTIONS	SOLID	FB72HC-5S	3/9	230	3/4 (X2)	14	68.5	75	33.75	78	725
		GLASS	FB72HC-5G									740

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

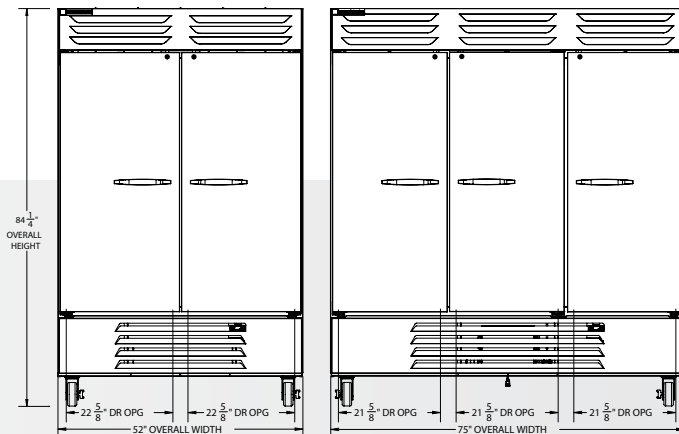

HORIZON® SERIES

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place polyurethane insulation)

Full electronic Control

with one-touch defrost

Door locks standard

(solid doors only, optional on glass door models)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at no charge when specified on order)

HC models featuring environmentally friendly, energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



FULL ELECTRONIC CONTROL
with easy to read digital display



DOOR LOCKS STANDARD
on solid door units for loss prevention
(available as an option for glass doors)

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators & Freezers



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits
- Wine models
- Dual-temp

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available



HORIZON® SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24" 1 SECTION	SOLID	HBR12HC-1	1/4	115	1/6	2	12.06	24	26	62	250
27" 1 SHALLOW SECTION	SOLID	HBR19HC-1	1/3	115	1/4	3	17.87	27.25	27.75	78	350
	GLASS	HBR19HC-1-G									353
27" 1 SECTION	SOLID	HBR23HC-1	1/3	115	1/4	3	23.1	27.25	33.75	78	392
	HALF SOLID	HBR23HC-1-HS	2/3								376
	GLASS	HBR23HC-1-G	1/3								400
	HALF GLASS	HBR23HC-1-HG	2/3								384
30" 1 SECTION	SOLID	HBR27HC-1	1/3	115	1/4	3	25.88	30	33.75	78	400
	HALF SOLID	HBR27HC-1-HS	2/3								380
	GLASS	HBR27HC-1-G	1/3								420
	HALF GLASS	HBR27HC-1-HG	2/3								410
40" 2 SECTION	SOLID	HBR35HC-1	2/6	115	1/4	2.4	36.87	39.5	33.75	78	500
	GLASS	HBR35HC-1-G									520
47" 2 SECTIONS	SOLID	HBR44HC-1	2/6	115	1/3	5.4	40.2	47	33.75	78	534
	HALF SOLID	HBR44HC-1-HS	4/6								530
	GLASS	HBR44HC-1-G	2/6								540
	HALF GLASS	HBR44HC-1-HG	4/6								538
52" 2 SECTIONS	SOLID	HBR49HC-1	2/6	115	1/3	5.4	46.15	52	33.75	78	594
	HALF SOLID	HBR49HC-1-HS	4/6								575
	GLASS	HBR49HC-1-G	2/6								608
	HALF GLASS	HBR49HC-1-HG	4/6								600
75" 3 SECTIONS	SOLID	HBR72HC-1	3/9	115	1/2	6.2	68.93	75	33.75	78	764
	HALF SOLID	HBR72HC-1-HS	6/9								771
	GLASS	HBR72HC-1-G	3/9								764
	HALF GLASS	HBR72HC-1-HG	6/9								771


NEW SIZE!

NEW SIZE!

NEW SIZE!

NEW SIZE!

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

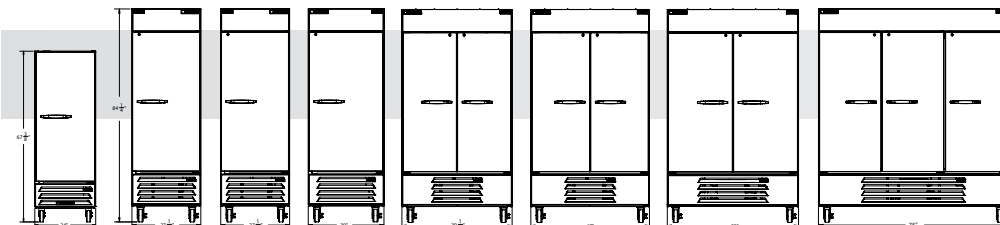

AVAILABLE OPTIONS

SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: HBR49-1-HS-18	

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

NEW SIZE!

NEW SIZE!

NEW SIZE!

NEW SIZE!

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
24" 1 SECTION	SOLID	HBFI2HC-1	1/3	115	1/2	5	11.9	24	26	62	264
	GLASS	HBFI2HC-1-G									284
27" 1 SHALLOW SECTION	SOLID	HBFI9HC-1	1/3	115	3/4	7.5	17.87	27.25	27.75	78	350
	GLASS	HBFI9HC-1-G									353
27" 1 SECTION	SOLID	HBFI23HC-1	1/2	115	3/4	7.5	22.5	27.25	33.75	78	428
	HALF SOLID	HBFI23HC-1-HS	2/2								412
	GLASS	HBFI23HC-1-G	1/2								452
	HALF GLASS	HBFI23HC-1-HG									446
30" 1 SECTION	SOLID	HBFI27HC-1	1/2	115	3/4	7.5	26.57	30	33.75	78	516
	HALF SOLID	HBFI27HC-1-HS	2/2								500
	GLASS	HBFI27HC-1-G	1/2								530
40" 2 SECTION	SOLID	HBFI35HC-1	2/6	115	3/4	11	36.87	39.5	33.75	78	510
	GLASS	HBFI35HC-1-G									530
47" 2 SECTIONS	SOLID	HBFI44HC-1	2/6	115	3/4	11	44	47	33.75	78	588
	HALF SOLID	HBFI44HC-1-HS	4/6								562
	GLASS	HBFI44HC-1-G	2/6								598
52" 2 SECTIONS	SOLID	HBFI49HC-1	2/6	115	3/4	11	46.2	52	33.75	78	750
	HALF SOLID	HBFI49HC-1-HS	4/6								735
	GLASS	HBFI49HC-1-G	2/6								790
75" 3 SECTIONS	SOLID	HBFI72HC-5	3/9	230	3/4 (X2)	14	68.5	75	33.75	78	790
	HALF SOLID	HBFI72HC-5-HS	6/9								758
	GLASS	HBFI72HC-5-G	3/9								858

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 2 HALF SECTIONS (1 FRIDGE/1 FREEZER)	HALF SOLID	HBRF23HC-1-A	2/4	115 (X2)	R: 1/10 F: 1/2	R: 2 F: 4	R: 11.5 F: 8.65	27.25	33.75	78	448
52" 2 SECTIONS (1 FRIDGE/1 FREEZER)	SOLID	HBRF49HC-1-A	2/6	115 (X2)	R: 1/4 F: 3/4	R: 2.4 F: 7.5	R: 21.01 F: 21.01	52	33.75	78	790
	GLASS	HBRF49HC-1-A-G									800
75" 3 SECTIONS (FRIDGE/FREEZER)	SOLID	HBRF72HC-1-B	3/9	115 (X2)	R: 1/4 F: 1	R: 2.4 F: 11	R: 19.62 F: 44.85	75	33.75	78	810
	GLASS	HBRF72HC-1-B-G									852

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

SLATE SERIES

NEW

Modern slate exterior finish looks great and is easy to clean

Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more

15-20% cost reduction versus current entry level bottom mount models

Electronic temperature control

LED lighting standard

Door locks standard

3 epoxy coated wire shelves per section



OFFERS FEATURES AND STYLE NOT FOUND IN OTHER ENTRY LEVEL BOTTOM MOUNT UNITS

DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

2 YEAR PARTS AND LABOR / ADDITIONAL 5 YEAR COMPRESSOR PART WARRANTY



MODERN SLATE FINISH
contrasts beautifully with the stainless steel doors and grille.



LED LIGHTING
for dynamic product presentation

AVAILABLE DOORS

- Solid (one full-door)

AGENCY CERTIFICATIONS




Intertek



Intertek

Refrigerators & Freezers

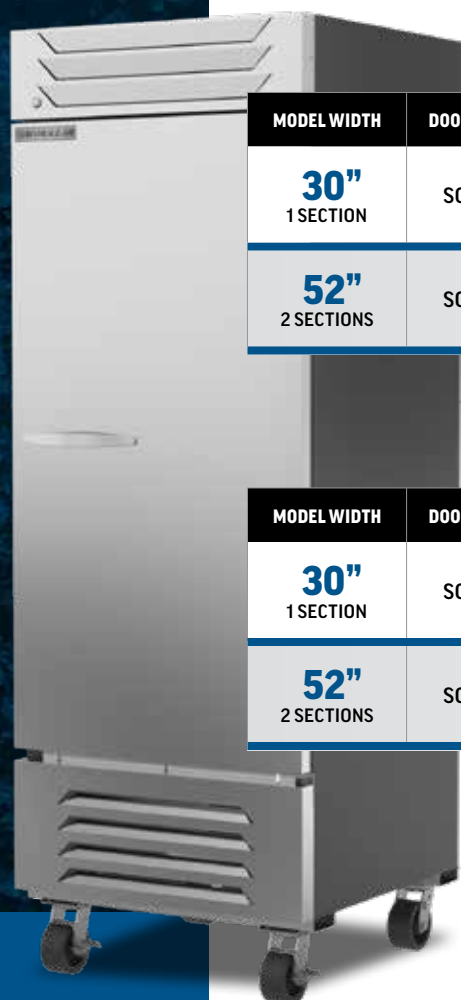

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
30" 1 SECTION	SOLID	SR1HC-1S	1/3	120	1/5	5	23	30.1	33.5	77.8	351
52" 2 SECTIONS	SOLID	SR2HC-1S	2/6	120	1/4	6	43	52	34.9	77.8	502

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF 0°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
30" 1 SECTION	SOLID	SF1HC-1S	1/3	120	1/3	5	23	30.1	33.5	77.8	344
52" 2 SECTIONS	SOLID	SF2HC-1S	2/6	120	1/2	6	43	52	34.9	77.8	502

Depth measurement includes handles. For total height, add 6 inches for casters.



EXTERIOR FINISHES

- Stainless steel doors and grille, with modern slate finish sides

INTERIOR FINISHES

- White coated steel walls with slate finish interior door

MOUNTING OPTIONS

- 6" casters (standard)

RI SERIES

Compact design

to fit challenging kitchen layouts

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place polyurethane insulation)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at no charge when specified on order)

HC models featuring environmentally friendly, energy efficient R290 refrigerant



DESIGNED TO PERFORM IN HIGH AMBIENT CONDITIONS

3 YEAR PARTS AND LABOR / ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY

MADE IN USA



FULL ELECTRONIC CONTROL
with easy to read digital display



BUILT-IN LED LIGHTS
Improved LED lighting for better product display

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)
- Half Glass, Half Solid (*two half-doors*)

AGENCY CERTIFICATIONS



Refrigerators

REFRIGERATORS (REACH-IN)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 1 SECTION	SOLID	RI18HC	1/4	115	1/4	5.5	16.85	27.25	29.25	69	322
	HALF SOLID	RI18HC-HS	2/5								328
	GLASS	RI18HC-G	1/4								367
	HALF GLASS	RI18HC-HG	2/5								334
	HALF GLASS HALF SOLID	RI18HC-HGS	2/5								334

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS (PASS-THRU)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 1 SECTION	HALF SOLID	RID18HC-HS	2/5	115	1/4	5.5	18.38	27.25	32.63	69	442
	HALF GLASS HALF SOLID	RID18HC-HGS	4/5								

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

AVAILABLE OPTIONS

SUFFIX	
18	Left hand hinge doors
R	Remote models available
Append suffix to model # when placing order. Ex: RI18HC-HS-18	



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE ACCESSORIES

- Pass-thru models available
- Additional shelves
- Wire shelf divider
- Bottle cartridge kit

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

Bottom Mount Reach-In Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF23	403-900D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF27	403-871D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF49	403-873D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF72	403-874D-02
Epoxy Coated Wire Shelf	RI18	403-207D
Shelf Clip	RB/FB/HBR/HBF	403-169A
Flat Wine Rack with Bottle Support	RB/FB/HBR23	403-928D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR27	403-929D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR49	403-930D-03
Flat Wine Rack with Bottle Support	RB/FB/HBR72	403-931D-03
Wire Divider	RI Series	403-719C
MOUNTING		
3" Caster Kit	RB/FB/HBR/HBF	61C01-018D-01
6" Caster Kit	RB/FB/HBR/HBF	61C01-014D-01
6" Seismic/Flanged Legs	RB/FB/HBR/HBF Series (set of four)	00C31-055A
3" Caster	RI Series	401-695B
3" Caster With Brake	RI Series	401-696B
6" Caster	RI Series	401-275A
6" Caster With Brake	RI Series	401-276A
6" Black Legs	RI Series	401-405A
ADDITIONAL ACCESSORIES		
Door Lock (at time of order)	RB/FB/HBR/HBF (SOLID DOORS)	401-274A
TRAY SLIDE KITS		
KIT #3 STAINLESS STEEL UNIVERSAL TRAY SLIDE		
8 SETS PER 1/2 SECTION	RB/FB/HBR/HBF 23	61C08-038A-02 (2)
	RB/FB/HBR/HBF 49	61C08-038A-01 (2)

P SERIES

LED lighting

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Expansion valve technology

Freezer only

Door locks standard

Solid and Glass doors

Magnetic gasket attached to each door

for positive seal

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 epoxy coated wire shelves

per section

Removable access panel

for ease of service and maintenance



**MAXIMUM RESISTANCE TO WEAR AND TEAR
WITH STAINLESS STEEL BREAKER CAPS AND DOOR LINERS**

**MODULAR INTERIOR GIVES ULTIMATE FLEXIBILITY
FOR SHELF AND SLIDE COMBINATIONS**

3 YEAR PARTS AND LABOR / ADDITIONAL 4 YEAR COMPRESSOR PART WARRANTY



TRAY SLIDES A AVAILABLE
holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE
hold one 18x26", or two 14x18",
or two 12x20"

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

CONFIGURATIONS

- Reach-in
- Pass-thru
- Roll-in / Roll-thru / Extra-tall
- Dual-temp

Spec Line Refrigeration



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AGENCY CERTIFICATIONS



AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits (reach-in & pass-thru only)
- Stainless steel shelves
- Chrome-plated shelves
- Kick plate

AVAILABLE OPTIONS

- Left hand hinge doors
- Remote models available

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- 3" casters
- Flanged/seismic feet

P SERIES

REFRIGERATORS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PR1HC-1AS	1/3	115	1/3	6.5	21.01	26.50	34.63	77.75	320
	HALF SOLID	PR1HC-1AHS	2/3	115	1/3	6.5	21.01	26.50	34.63	77.75	320
	GLASS	PR1HC-1BG	1/3	115	1/3	6.5	21.01	26.50	33.38	77.75	406
	HALF GLASS	PR1HC-1BHG	2/6	115	1/3	6.5	21.01	26.50	33.38	77.75	398
52" 2 SECTION	SOLID	PR2HC-1AS	2/6	115	1/3	6.5	44.57	52.13	34.63	77.75	483
	HALF SOLID	PR2HC-1AHS	4/6	115	1/3	6.5	44.57	52.13	34.63	77.75	483
	GLASS	PR2HC-1BG	2/6	115	1/2	6.5	44.57	52.13	33.38	77.75	600
	HALF GLASS	PR2HC-1BHG	4/6	115	1/2	6.5	44.57	52.13	33.38	77.75	624
78" 3 SECTIONS	SOLID	PR3HC-1AS	3/9	115	3/4	8.5	68.34	77.75	34.63	77.75	625
	HALF SOLID	PR3HC-1AHS	6/9		3/4	8.5	68.34				
	GLASS	PR3HC-1BG	3/9	115	3/4	8.5	68.34	77.75	33.38	77.75	841
	HALF GLASS	PR3HC-1BHG	6/9		3/4	8.5	68.34				

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PRD1HC-1AS	2/3	115	1/3	6.5	22.9	26.50	38.38	77.75	370
	HALF SOLID	PRD1HC-1AHS	4/3								370
	GLASS	PRD1HC-1BG	2/3								471
	HALF GLASS	PRD1HC-1BHG	4/3								436
52" 2 SECTION	SOLID	PRD2HC-1AS	4/6	115	1/3	6.5	48.33	52.13	38.38	77.75	682
	HALF SOLID	PRD2HC-1AHS	8/6								652
	GLASS	PRD2HC-1BG	4/6	115	3/4	8.5	48.33	52.13	38.38	77.75	738
	HALF GLASS	PRD2HC-1BHG	8/6								738
78" 3 SECTIONS	SOLID	PRD3HC-1AS	6/9	115	3/4	8.5	74	77.75	38.38	77.75	950
	HALF SOLID	PRD3HC-1AHS	12/9								950
	GLASS	PRD3HC-1BG	6/9	115	1/3 (X2)	10.8	75.1	77.75	38.38	77.75	912
	HALF GLASS	PRD3HC-1BHG	12/9								912

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PRI1HC-1AS	1/0	115	1/3	6.5	34.86	36.5	36.13	84	426
		PRI1XTHC-1AS					38.06			89.63	438
69" 2 SECTION	SOLID	PRI2HC-1AS	2/0	115	3/4	8.5	70.84	68.88	36.13	84	735
		PRI2XTHC-1AS					77.35			89.63	766
101" 3 SECTION	SOLID	PRI3HC-1AS	3/0	115	2x 1/3	10.8	106.81	101.25	36.13	84	1,206


Depth measurement includes handles.

REFRIGERATORS - ROLL-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PRT1HC-1AS	2/0	115	3/4	8.5	38.69	36.5	39.88	84	451
		PRT1XTHC-1AS					42.27			89.63	463
69" 2 SECTION	SOLID	PRT2HC-1AS	4/0	115	3/4	8.5	78.49	68.88	39.88	84	770
		PRT2XTHC-1AS					85.76			89.63	805
101" 3 SECTION	SOLID	PRT3HC-1AS	6/0	115	2x 1/3	10.8	118.3	101.25	39.88	84	1,231

Depth measurement includes handles.

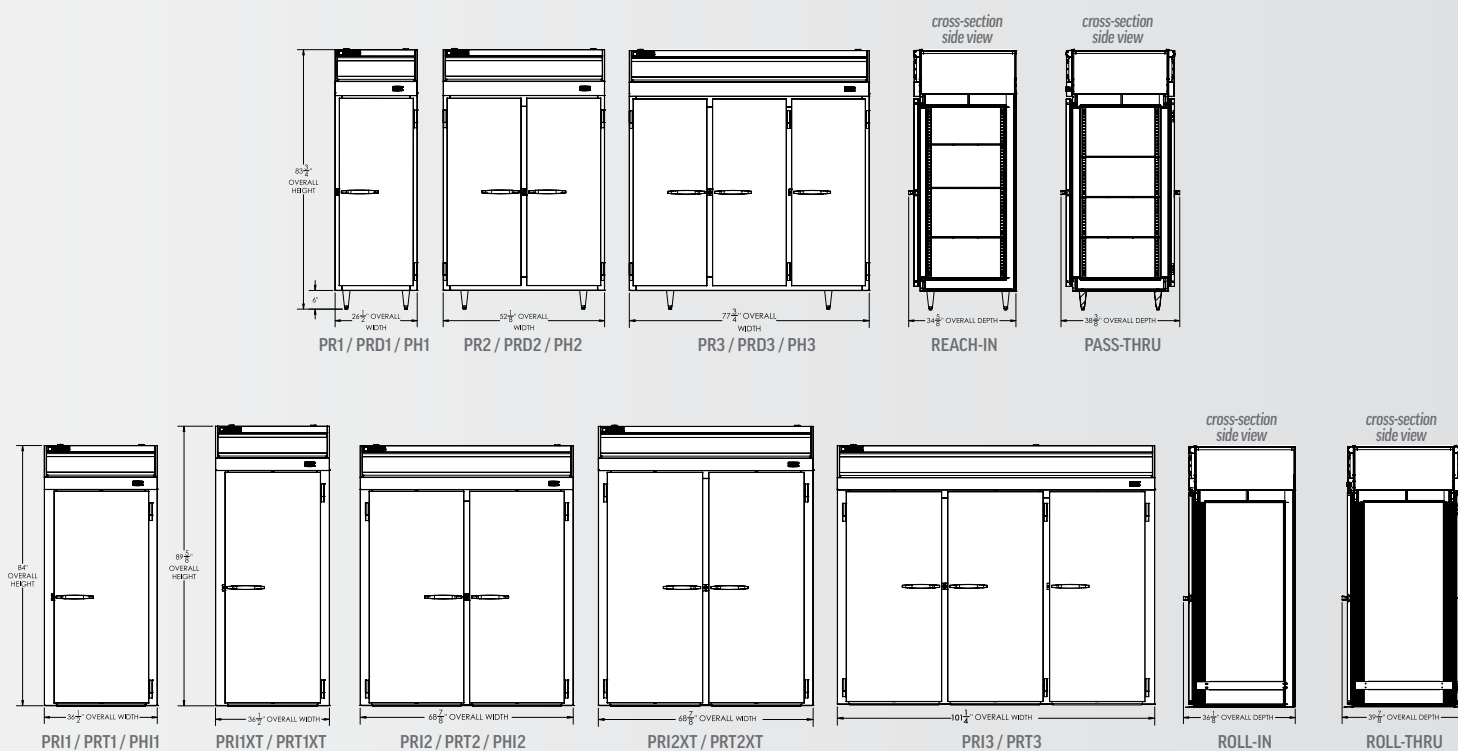

P SERIES

FREEZERS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PF1HC-1AS	1/3	115	3/4	9.1	21.01	26.50	34.63	77.75	320
	HALF SOLID	PF1HC-1AHS	2/3	115	3/4	9.1	21.01	26.50	34.63	77.75	320
	GLASS	PF1HC-1BG	1/3	115	3/4	9.1	21.01	26.50	33.38	77.75	406
	HALF GLASS	PF1HC-1BHG	2/6	115	3/4	9.1	21.01	26.50	33.38	77.75	398
52" 2 SECTION	SOLID	PF2HC-1AS	2/6	115	3/4+	10.5	44.57	52.13	34.63	77.75	483
	HALF SOLID	PF2HC-1AHS	4/6	115	3/4+	10.5	44.57	52.13	34.63	77.75	483
	GLASS	PF2HC-1BG	2/6	115	2 X 3/4	13.9	44.57	52.13	33.38	77.75	600
	HALF GLASS	PF2HC-1BHG	4/6	115	2 X 3/4	13.9	44.57	52.13	33.38	77.75	624
78" 3 SECTIONS	SOLID	PF3HC-1AS	3/9	115	2 X 3/4	13.9	68.34	77.75	34.63	77.75	625
	HALF SOLID	PF3HC-1AHS	6/9		2 X 3/4	13.9	68.34				
	GLASS	PF3HC-1BG	3/9	115	2 X 3/4	13.9	68.34	77.75	33.38	77.75	841
	HALF GLASS	PF3HC-1BHG	6/9		2 X 3/4	13.9	68.34				

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
26.5" 1 SECTION	SOLID	PFD1HC-1AS	2/3	115	3/4	9.1	22.9	26.50	38.38	77.75	370
	HALF SOLID	PFD1HC-1AHS	4/3	115	3/4	9.1	22.9	26.50	38.38	77.75	370
	GLASS	PFD1HC-1BG	2/3	115	3/4	10.5	22.9	26.50	35.88	77.75	471
	HALF GLASS	PFD1HC-1BHG	4/3	115	3/4	10.5	22.9	26.50	35.88	77.75	436
52" 2 SECTION	SOLID	PFD2HC-1AS	4/6	115	2 X 3/4	13.9	48.33	52.13	38.38	77.75	682
	HALF SOLID	PFD2HC-1AHS	8/6	115	2 X 3/4	13.9	48.33	52.13	38.38	77.75	652
	GLASS	PFD2HC-1BG	4/6	115	2 X 3/4	13.9	48.33	52.13	35.88	77.75	738
	HALF GLASS	PFD2HC-1BHG	8/6	115	2 X 3/4	13.9	48.66	52.13	35.88	77.75	738

Depth measurement includes handles.
For total height, add 3 or 6 inches, based on your mounting choice.

Spec Line Freezers & Dual Temps

FREEZERS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PFI1HC-1AS	1/0	115	3/4	9.1	34.86	36.5	36.13	84	426
		PFI1XTHC-1AS					38.06			89.63	438
69" 2 SECTION	SOLID	PFI2HC-1AS	2/0	115	2 X 3/4	13.9	70.84	68.88	36.13	84	735
		PFI2XTHC-1AS					77.35			89.63	766
101" 3 SECTION	SOLID	PFI3HC-1AS	3/0	115	2 X 3/4	13.9	106.81	101.25	36.13	84	1,206

Depth measurement includes handles.

FREEZERS - ROLL-THRU

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
36.5" 1 SECTION	SOLID	PFT1HC-1AS	2/0	115	3/4+	10.5	38.69	36.5	39.88	84	451
		PFT1XTHC-1AS					42.27			89.63	463
69" 2 SECTION	SOLID	PFT2HC-1AS	4/0	115	2 X 3/4	13.9	78.49	68.88	39.88	84	735
		PFT2XTHC-1AS					85.76			89.63	766

Depth measurement includes handles.


DUAL-TEMPS - REACH-IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

MODEL WIDTH	DOOR TYPE	MODEL #	DOORS/ SHELVES	VOLTS	HP	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
27" 2 HALF SECTIONS (1 FRIDGE/1 FREEZER)	HALF SOLID	PRF12-12HC-1HS	2/4	115 (X2)	R: 1/3 F: 1/3	R: 7.5 F: 7.5	R: 9 F: 9	26.63	34.63	77.75	438
	HALF GLASS	PRF12-12HC-1HG									448
52" 2 SECTIONS (1 FRIDGE/1 FREEZER)	SOLID	PRF24-24HC-1AS	2/6	115 (X2)	R: 1/3 F: 3/4	R: 6.5 F: 9.1	R: 21 F: 21	52	33	77.75	701
	HALF SOLID	PRF24-24HC-1AHS									692

Depth measurement includes handles.

For total height, add 3 or 6 inches, based on your mounting choice.

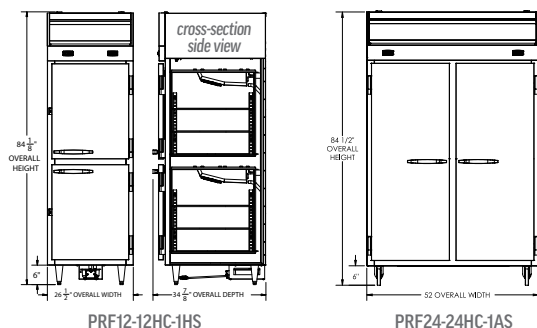

P SERIES

Stainless steel breakers

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Built-in adjustable humidity control

Door locks standard

for both Solid and Glass doors

Magnetic gasket attached to each door

for positive seal

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 chrome-plated wire shelves

per section

Removable access panel

for ease of service and maintenance

Temperature range from 80-180° F



**MAXIMUM RESISTANCE TO WEAR AND TEAR
WITH STAINLESS STEEL BREAKER CAPS AND DOOR LINERS**

**MODULAR INTERIOR GIVES MAXIMUM FLEXIBILITY
FOR SHELF AND SLIDE COMBINATIONS**

3 YEAR PARTS AND LABOR WARRANTY



TRAY SLIDES A AVAILABLE
holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE
hold one 18x26", or two 14x18",
or two 12x20"

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

CONFIGURATIONS

- Reach-in
- Pass-thru
- Roll-in / Roll-thru / Extra-tall