



# SUSHI CASES

## Features & Benefits of HOSHIZAKI Sushi Cases

- Energy efficient LED lights with on/off switch
- Elegant curved front glass design enhances product on display
- Condenser airflow comes in the back and out the side
- Large diameter 1" drain at front, vinyl hose included
- NSF approved thermometer
- Easy to clean ceiling
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- Energy-efficient and environmentally friendly R600a refrigerant



Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Shipping Dimensions W x D x H	Electrical	Shipping Weight	List F.O.B. Griffin
<b>HNC-120BA-R-SLH</b>	Air-Cooled	Right Side	47.2" x 13.6" x 11"	51.5" x 16.5" x 20.5"	115V/60/1	92 Lbs.	<b>\$6,250</b>
<b>HNC-120BA-L-SLH</b>	Air-Cooled	Left Side	47.2" x 13.6" x 11"	51.5" x 16.5" x 20.5"	115V/60/1	94 Lbs.	<b>\$6,250</b>
<b>HNC-150BA-R-SLH</b>	Air-Cooled	Right Side	59.1" x 13.6" x 11"	62.25" x 16.5" x 20.5"	115V/60/1	115 Lbs.	<b>\$6,750</b>
<b>HNC-150BA-L-SLH</b>	Air-Cooled	Left Side	59.1" x 13.6" x 11"	62.25" x 16.5" x 20.5"	115V/60/1	115 Lbs.	<b>\$6,750</b>
<b>HNC-180BA-R-SLH</b>	Air-Cooled	Right Side	70.9" x 13.6" x 11"	74" x 16.5" x 20.5"	115V/60/1	130 Lbs.	<b>\$7,540</b>
<b>HNC-180BA-L-SLH</b>	Air-Cooled	Left Side	70.9" x 13.6" x 11"	74" x 16.5" x 20.5"	115V/60/1	130 Lbs.	<b>\$7,540</b>
<b>HNC-210BA-R-SLH</b>	Air-Cooled	Right Side	82.7" x 13.6" x 11"	85.75" x 16.5" x 20.5"	115V/60/1	145 Lbs.	<b>\$8,340</b>
<b>HNC-210BA-L-SLH</b>	Air-Cooled	Left Side	82.7" x 13.6" x 11"	85.75" x 16.5" x 20.5"	115V/60/1	145 Lbs.	<b>\$8,340</b>


"R" - Condensing Unit is on RIGHT from front view

"L" - Condensing Unit is on LEFT from front view

Not intended for overnight storage. NSF Standard 7




**HNC-120BA-L-SLH**

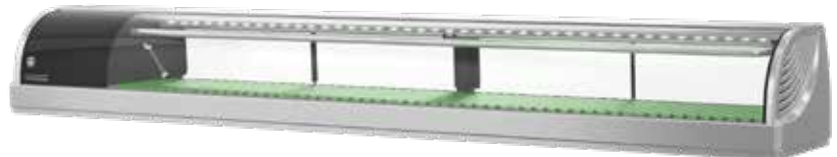

**HNC-210BA-L-SLH**



**HNC-150BA-L-SLH**

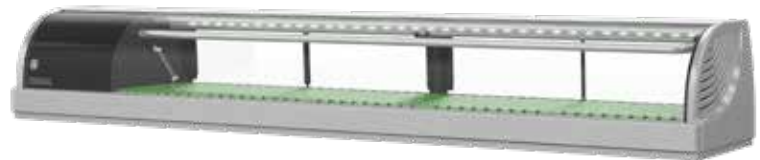

**HNC-180BA-L-SLH**



# GLASS DOOR MERCHANDISERS



**RM-7-HC**      **RM-10-HC** **ENERGY STAR** **Qualified**      **RM-26-HC** **ENERGY STAR** **Qualified**      **RM-45-SD-HC** **(Sliding doors)**      **RM-49-HC**      **RM-65-HC**

- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air evaporator for quick temperature pull down
- Large glass door(s) is energy efficient low-E multi pane glass
- Doors mounted on heavy duty hinges with self-closing mechanism
- Three year parts and labor warranty & Five year compressor warranty
- Locks on doors are standard (accept for RM-7-HC)

Model Number	RM-7-HC	RM-10-HC	RM-26-HC	RM-45-SD-HC	RM-49-HC	RM-65-HC
<b>Capacity</b>	20 oz. bottles: 102 12 oz. cans: 217	20 oz. bottles: 168 12 oz. cans: 384	20 oz. bottles: 360 12 oz. cans: 900	20 oz. bottles: 560 12 oz. cans: 1260	20 oz. bottles: 630 12 oz. cans: 1440	20 oz. bottles: 830 12 oz. cans: 1926
<b>Overall Dimensions (W x D x H Including Leveling Feet)</b>	21.25" x 25" x 37.75"	25" x 22.75" x 54.5"	30" x 29.75" x 78"	51" x 30.25" x 78.25"	60" x 29.75" x 78"	78" x 29.75" x 78"
<b>Adjustable Shelves</b>	2 adjustable, 1 floor shelf	3	5	5 per section	5 per section	5 per section
<b>Shelf Dimensions (W x D)</b>	17.75" x 20.75" 18" x 9.25" (Floor)	21" x 17.5"	25.75" x 24"	23" x 20.5"	27" x 21.75"	(C) 27.3" x 21.7" (L/R) 22.4" x 21.7"
<b>Crated Shipping Weight</b>	180 lbs.	230 lbs.	331 lbs.	520 lbs.	610 lbs.	800 lbs.
<b>Crated Shipping Dimensions (L x W x H)</b>	28" x 25" x 44"	30" x 30" x 60"	34" x 34" x 82"	54" x 32.25" x 84"	63" x 32.5" x 86"	81" x 32.25" x 84"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage (AMP)</b>	3.2	1.8	3.2	6.5	7.6	8.2
<b>HACR Breaker (AMP)</b>	15	15	15	15	15	15
<b>Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	1.38	1.1	1.81	4.55	4.37	5.67
<b>Approx. Nominal Compress BTU/HR (HP)</b>	1/8HP	1/5HP	1/3HP	1/2HP	1/2HP	(L) 1/3HP (R) 1/3HP
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F
<b>Control Set Point Range</b>	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F
<b>Refrigerant</b>	R290	R290	R290	R290	R290	R290
<b>List F.O.B. Griffin</b>	<b>\$5,260</b>	<b>\$5,790</b>	<b>\$7,580</b>	<b>\$11,200</b>	<b>\$11,680</b>	<b>\$15,580</b>

See Refrigeration Accessories on pages 84-89 for options and prices

