



**GAS**

PRO SERIES | COUNTER TOPS

**IMPERIAL**



## PSH

Shown with optional casters.

Model Numbers

PSH424

PSH636

PSH848

## PROFESSIONAL COUNTERTOP HOT PLATE

- Designed for high volume users and chains.
- Full stainless steel exterior.
- 304 stainless steel burner box, top grate supports and burner supports.
- All brass control components.
- Newly designed cast iron top grate featuring new bowl design.
- Full welded stainless steel crumb tray.
- All metal control knobs.
- 32,000 BTU burner.
- Low profile landing ledge.
- Includes 4" stainless steel legs.


## EXTERIOR FEATURES

- Designed and built with heavier gauge 304 stainless steel for durability and long service life.
- All seams are 100% welded and polished.
- Newly designed die cast metal knobs for ease of use.
- Designed so it can be used on refrigerator base.



**GAS**

PRO SERIES | COUNTER TOPS

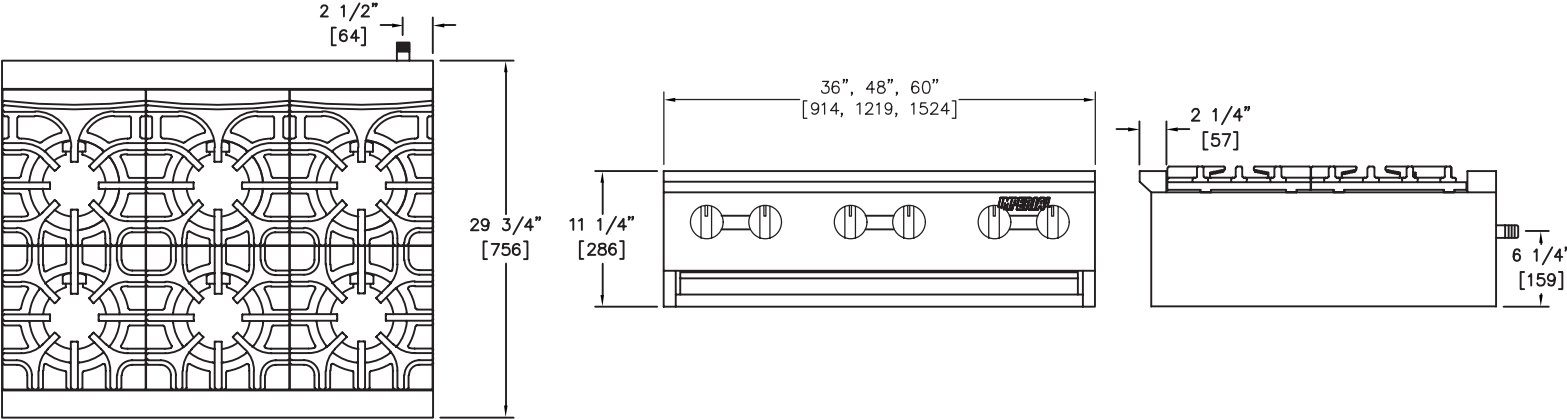

**PROFESSIONAL COUNTERTOP HOT PLATES**

WIDTH	MODEL	BURNERS	GAS OUTPUT BTU	SHIP WEIGHT LBS
24"	PSH424	4	128,000	180
36"	PSH636	6	192,000	230
48"	PSH848	8	256,000	310
60"	PSH1060	10	320,000	375

MODEL	DIMENSIONS	CRATED DIMENSIONS
PSH424	24" W X 29-3/4" D X 11-1/4" H 610MM X 756MM X 286MM	25"-3/4" W X 34-1/2" D X 17-1/2" H 654MM X 876MM X 445MM
PSH636	36" W X 29-3/4" D X 11-1/4" H 914MM X 756MM X 286MM	37"-3/4" W X 34-1/2" D X 17-1/2" H 959MM X 876MM X 445MM
PSH848	48" W X 29-3/4" D X 11-1/4" H 1219MM X 756MM X 286MM	49"-3/4" W X 34-1/2" D X 17-1/2" H 1264MM X 876MM X 445MM
PSH1060	60" W X 29-3/4" D X 11-1/4" H 1524MM X 756MM X 286MM	61"-3/4" W X 34-1/2" D X 17-1/2" H 1594MM X 876MM X 445MM



**EXTERIOR**

- Stainless steel front, sides, stub back, landing ledge and cabinet
- Welded and polished stainless steel seams
- Control knobs are durable die cast metal knobs
- Optional 6" (152 mm) heavy duty legs with adjustable feet
- One year parts and labor warranty
- 3/4" rear gas connection for single unit connection
- 3/4" Gas shut off valve
- 3/4" Gas pressure regulator

**OPTIONS AND ACCESSORIES**

- Stainless steel center shelf in open cabinet base
- Quick disconnect and flexible gas hose, 3/4" or 1-1/4", N.P.T.
- Stainless steel equipment stand for modular unit
- 6" (152 mm) casters for stainless steel stand



**GAS**

OPEN BURNERS | HOT PLATES STEP UP

**IMPERIAL**



## IHPA-3-36SU

Model Numbers

IHPA-2-12SU

IHPA-4-24SU

IHPA-6-36SU

IHPA-8-48SU



**LARGE 5" (127 MM) STAINLESS STEEL LANDING LEDGE FOR CONVENIENT PLATING.**

## OPEN BURNERS

- PyroCentric™ 32,000 BTU (9 KW) anti-clogging burner with a 7,000 BTU/hr. (2 KW) low simmer feature. Two rings of flame for even heating.
- Burners are anti-clogging and lift-off and separate for easy cleaning.
- No gaskets or screws.
- One standing pilot per burner for instant ignition.

## GRATES

- Anti-clogging pilot is designed into the grate to shield the pilots from grease and debris.
- Pots slide easily from section to section and onto landing ledge.
- Grates are cast iron for a long service life.


## EXTERIOR FEATURES

- Stainless steel front, sides and landing ledge for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range Match profile when placed on a refrigerated base or equipment stand.
- Stainless steel landing ledge is ideal for plating.
- Control knobs are durable die cast metal for long life.
- Full width, removable crumb tray for easy cleaning.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.




GAS

OPEN BURNERS | HOT PLATES STEP UP

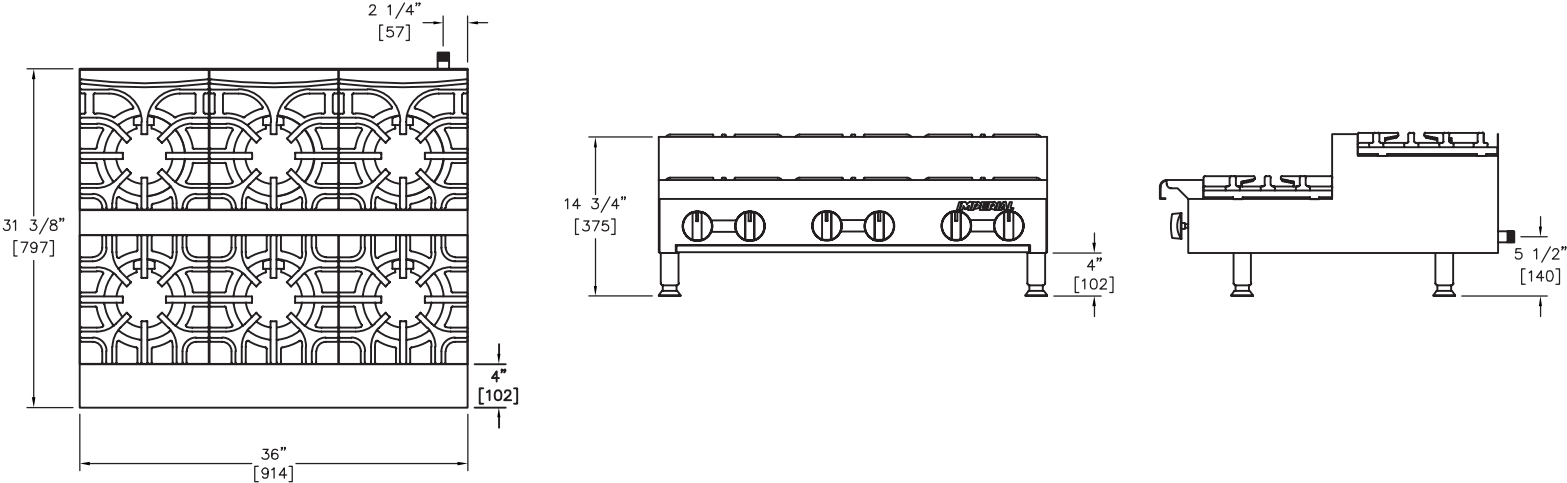

GAS HOT PLATES - STEP UP

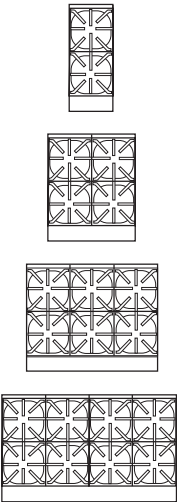

WIDTH	MODEL	OPEN BURNERS	GAS OUTPUT		SHIP WEIGHT	
			BTU	KW	KG	LBS
12" (305)	IHPA-2-12SU	2	64,000	19	41	90
24" (610)	IHPA-4-24SU	4	128,000	38	68	150
36" (914)	IHPA-6-36SU	6	192,000	56	114	250
48" (1219)	IHPA-8-48SU	8	256,000	75	145	320

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 10" (254 mm) stainless steel wok ring
- Saute burner head, interchangeable
- Gas shut off valve 3/4" N.P.T
- Quick disconnect and flexible gas hose 3/4" N.P.T

CLEARANCE REQUIREMENTS

Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHPA-2-12SU	12" W X 31-3/8" D X 14-3/4" H (305 X 797 X 381 MM)	14-1/2" W X 34" D X 17" H (368 X 864 X 432 MM)
IHPA-4-24SU	24" W X 31-3/8" D X 14-3/4" H (610 X 797 X 381 MM)	26-1/2" W X 34" D X 17" H (673 X 864 X 432 MM)
IHPA-6-36SU	36" W X 31-3/8" D X 14-3/4" H (914 X 797 X 381 MM)	38-1/2" W X 34" D X 17" H (978 X 864 X 432 MM)
IHPA-8-48SU	48" W X 31-3/8" D X 14-3/4" H (1219 X 797 X 381 MM)	50-1/2" W X 34" D X 17" H (1283 X 864 X 432 MM)

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)



**Notes:** Measurements in ( ) are metric equivalents.  
**Crated Dimensions:** 12"h (305). Add 2 1/2" (64) to Hot Plate depth and width. Add 4" (102) to height for Step-up style.





**GAS**

OPEN BURNERS | HOT PLATES 31 3/8"

**IMPERIAL**



## IHPA-6-36

Model Numbers

IHPA-2-12

IHPA-4-24

IHPA-6-36

IHPA-8-48

IHPA-10-60



**LARGE 5" (127 MM) STAINLESS STEEL LANDING LEDGE FOR CONVENIENT PLATING.**

## OPEN BURNERS

- PyroCentric™ 32,000 BTU (9 KW) anti-clogging burner with a 7,000 BTU/hr. (2 KW) low simmer feature. Two rings of flame for even heating.
- Cast iron PyroCentric burners are standard on all IR Series Ranges.
- Burners are anti-clogging and lift-off and separate for easy cleaning.
- No gaskets or screws.
- One standing pilot per burner for instant ignition.

## GRATES

- Top grates feature 2 sections for easy and safe to lift-off for cleaning.
- Grates have a cast-in bowl that directs heat upward.
- Anti-clogging pilot is designed into the grate to shield the pilots from grease and debris.
- Pots slide easily from section to section and onto landing ledge.
- Grates are cast iron for a long service life.


## EXTERIOR FEATURES

- Stainless steel front, sides and landing ledge for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range Match profile when placed on a refrigerated base or equipment stand.
- Stainless steel landing ledge is ideal for plating.
- Control knobs are durable die cast metal for long life.
- Full width, removable crumb tray for easy cleaning.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.




GAS

OPEN BURNERS | HOT PLATES 31 3/8"

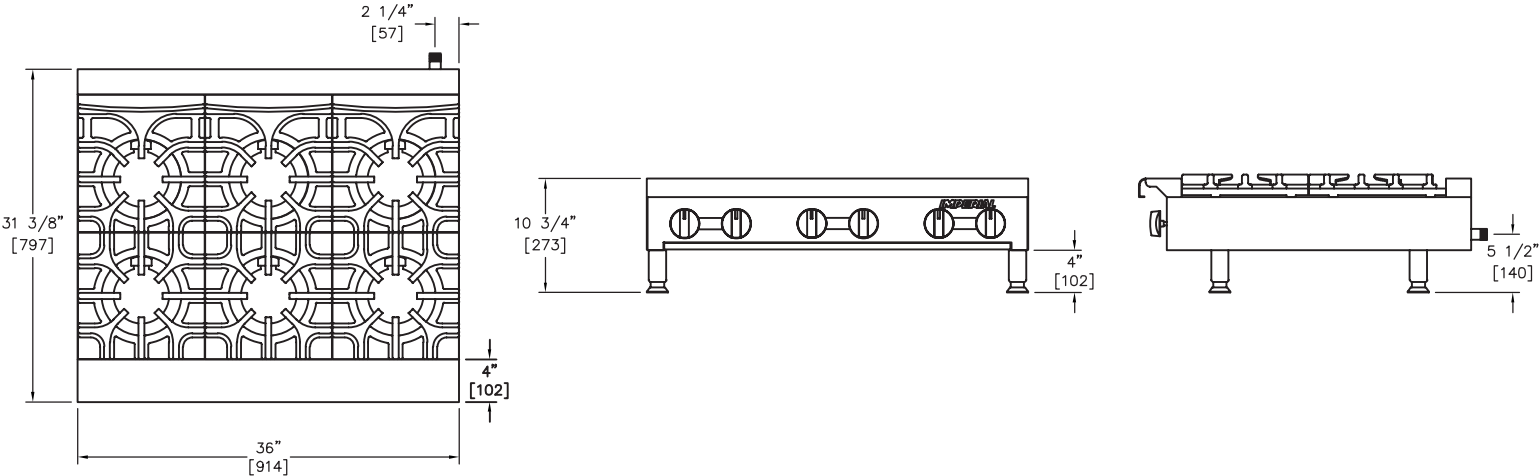

GAS HOT PLATES - 31-3/8" (797 MM) DEPTH

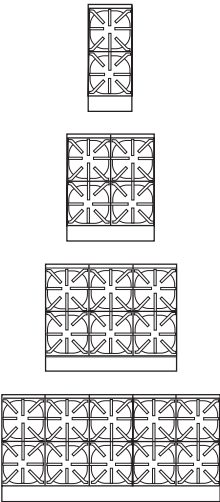

WIDTH	MODEL	OPEN BURNERS	GAS OUTPUT		SHIP WEIGHT	
			BTU	KW	KG	LBS
12" (305)	IHPA-2-12	2	64,000	19	37	80
24"(610)	IHPA-4-24	4	128,000	38	64	140
36" (914)	IHPA-6-36	6	192,000	56	95	210
48" (1219)	IHPA-8-48	8	256,000	75	123	270
60" (1524)	IHPA-10-60	10	320,000	94	147	325

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHPA-2-12	12" W X 31-3/8" D X 10-3/4" H (305 X 797 X 273 MM)	14-1/2" W X 34" D X 12" H (368 X 864 X 305 MM)
IHPA-4-24	24" W X 31-3/8" D X 10-3/4" H (610 X 797 X 273 MM)	26-1/2" W X 34" D X 12" H (673 X 864 X 305 MM)
IHPA-6-36	36" W X 31-3/8" D X 10-3/4" H (914 X 797 X 273 MM)	38-1/2" W X 34" D X 12" H (978 X 864 X 305 MM)
IHPA-8-48	48" W X 31-3/8" D X 10-3/4" H (1219 X 797 X 273 MM)	50-1/2" W X 34" D X 12" H (1283 X 864 X 305 MM)
IHPA-10-60	60" W X 31-3/8" D X 10-3/4" H (1524 X 797 X 273 MM)	62-1/2" W X 34" D X 12" H (1588 X 864 X 305 MM)

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 10" (254 mm) stainless steel wok ring
- Saute burner head, interchangeable
- Wok burner head, interchangeable
- Gas shut off valve 3/4" N.P.T
- Quick disconnect and flexible gas hose 3/4" N.P.T

CLEARANCE REQUIREMENTS

Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)





**GAS**

OPEN BURNERS | HOT PLATES 19 1/4"

**IMPERIAL**



## IHPA-3-36

Model Numbers

IHPA-1-12

IHPA-2-24

IHPA-3-36

IHPA-4-48



LARGE 5" (127 MM) STAINLESS STEEL LANDING LEDGE FOR CONVENIENT PLATING.

## OPEN BURNERS

- PyroCentric™ 32,000 BTU (9 KW) anti-clogging burner with a 7,000 BTU/hr. (2 KW) low simmer feature. Two rings of flame for even heating.
- Cast iron PyroCentric burners are standard on all IHPA hot plates.
- Burners are anti-clogging and lift-off and separate for easy cleaning.
- No gaskets or screws.
- One standing pilot per burner for instant ignition.

## GRATES

- Top grates feature 2 sections for easy and safe to lift-off for cleaning.
- Grates have a cast-in bowl that directs heat upward.
- Anti-clogging pilot is designed into the grate to shield the pilots from grease and debris.
- Pots slide easily from section to section and onto landing ledge.
- Grates are cast iron for a long service life.


## EXTERIOR FEATURES

- Stainless steel front, sides and landing ledge for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range Match profile when placed on a refrigerated base or equipment stand.
- 4" Stainless steel landing ledge is ideal for plating.
- Control knobs are durable die cast metal for long life.
- Full width, removable crumb tray for easy cleaning.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.




GAS

OPEN BURNERS | HOT PLATES - 19 1/4"

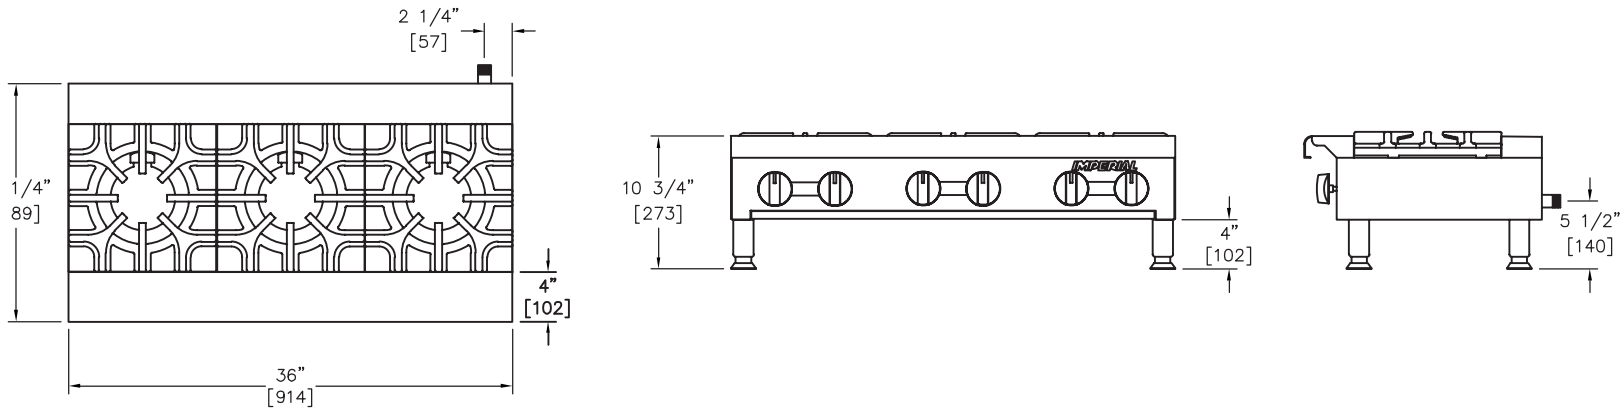

GAS HOT PLATES - 19 1/4" (489 MM) DEPTH

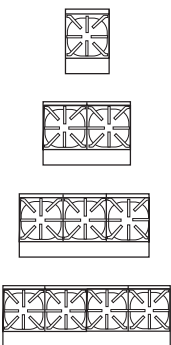

WIDTH	MODEL	OPEN BURNERS	GAS OUTPUT		SHIP WEIGHT	
			BTU	KW	KG	LBS
12" (305 MM)	IHPA-1-12	1	32,000	9	21	45
24" (610 MM)	IHPA-2-24	2	64,000	19	37	80
36" (914 MM)	IHPA-3-36	3	96,000	28	53	115
48" (1219 MM)	IHPA-4-48	4	128,000	38	64	140

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 10" (254 mm) stainless steel wok ring
- Saute burner head, interchangeable
- Wok burner head, interchangeable
- Stainless steel wok ring
- Gas shut off valve 3/4" N.P.T
- Quick disconnect and flexible gas hose 3/4" N.P.T

CLEARANCE REQUIREMENTS

Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHPA-1-12	12" W X 19-1/4" D X 10-3/4" H (305 X 489 X 273 MM)	14-1/2" W X 22" D X 12" H (368 X 559 X 305 MM)
IHPA-2-24	24" W X 19-1/4" D X 10-3/4" H (305 X 489 X 273 MM)	26-1/2" W X 22" D X 12" H (3673X 559 X 305 MM)
IHPA-3-36	36" W X 19-1/4" D X 10-3/4" H (914 X 489 X 273 MM)	38-1/2" W X 22" D X 12" H (978 X 559 X 305 MM)
IHPA-4-48	48" W X 19-1/4" D X 10-3/4" H (1219 X 489 X 273 MM)	50-1/2" W X 22" D X 12" H (1283 X 559 X 305 MM)

Notes: Models IHPA-2-12, IHPA-4-24, IHPA-6-36, IHPA-8-48 have a double row of open burners and measure 31-3/8" d (797 mm)

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)






# ELECTRIC

ELECTRIC ROUNDTYPES | HOT PLATES 31-3/8" DEPTH

# IMPERIAL

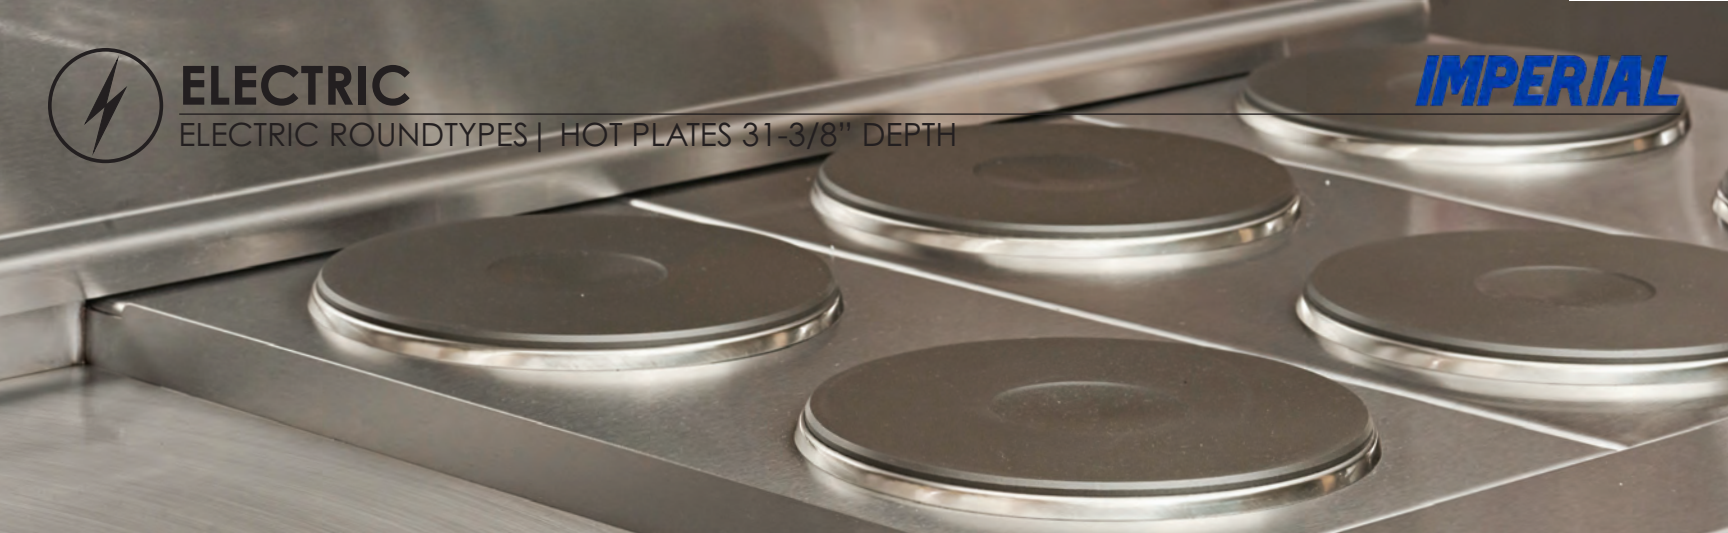

## IHPA-6-36-E

Model Numbers

IHPA-2-12-E

IHPA-4-24-E

IHPA-6-36-E

IHPA-8-48-E

IHPA-10-60-E



9" (229 MM) SEALED ROUND  
PLATE ELEMENTS WITH EASY TO  
CLEAN FLAT SURFACE.



LARGE 5" (127 MM) STAIN-  
LESS STEEL LANDING LEDGE  
FOR CONVENIENT PLATING.

## ROUND PLATE ELEMENTS

- 2 KW round plate elements with easy-to-clean flat surface.
- Provides a solid flat surface for fast, even heating.
- Plates are 9" (229) diameter for maximum pan contact.
- Solid top prevents spills from entering unit making clean-up easy.
- Infinite heat controls for maximum cooking flexibility.


## EXTERIOR FEATURES

- Stainless steel front, top and sides for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range match profile when placed on a refrigerated base or equipment stand.
- Large 5" (127 mm) stainless steel landing ledge is ideal for plating.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.




ELECTRIC

ELECTRIC ROUNDTYPES | HOT PLATES 31-3/8" DEPTH

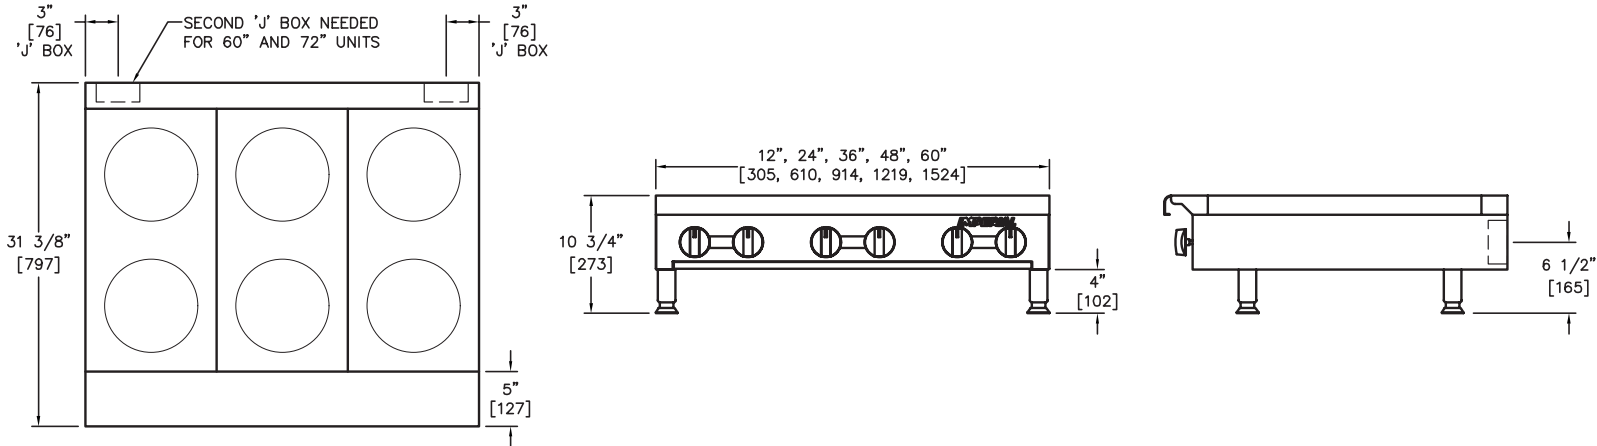

ELECTRIC HOT PLATES - 31-3/8" (797 MM) DEPTH

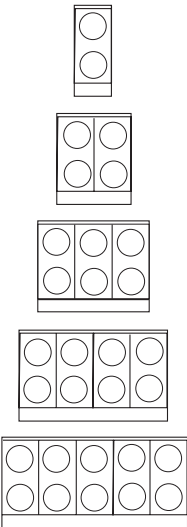

MODEL	WIDTH INCHES (MM)	ROUND ELEMENTS	OUTPUT KW	SHIP WEIGHT	
				KG	LBS
IHPA-2-12-E	12" (305)	2	4	37	80
IHPA-4-24-E	24" (610)	4	8	64	140
IHPA-6-36-E	36" (914)	6	12	95	210
IHPA-8-48-E	48" (1219)	8	16	123	270
IHPA-10-60-E	60" (1524)	10	20	147	325

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHPA-2-12-E	12" W X 31-3/8" D X 10-3/4" H (305 X 797 X 273 MM)	14-1/2" W X 35" D X 12" H (368 X 889 X 324 MM)
IHPA-4-24-E	24" W X 31-3/8" D X 10-3/4" H (610 X 797 X 273 MM)	26-1/2" W X 35" D X 12" H (673 X 889 X 324 MM)
IHPA-6-36-E	36" W X 31-3/8" D X 10-3/4" H (914 X 797 X 273 MM)	38-1/2" W X 35" D X 12" H (978 X 889 X 324 MM)
IHPA-8-48-E	48" W X 31-3/8" D X 10-3/4" H (1219 X 797 X 273 MM))	50-1/2" W X 35" D X 12" H (1283 X 889 X 324 MM)
IHPA-10-60-E	60" W X 31-3/8" D X 10-3/4" H (1524 X 797 X 273 MM)	62-1/2" W X 35" D X 12" H (1588 X 889 X 324 MM)

CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 480 volts(additional charge)



AMPERAGE REQUIREMENTS				
MODEL	TOTAL KW	VOLTS	PH	AMPS
IHPA-2-12-E	4	208	1	19
	4	208	3	14
	4	240	1	17
	4	240	3	13
	4	480*	3	6
IHPA-4-24-E	8	208	1	39
	8	208	3	29
	8	240	1	33
	8	240	3	25
	8	480*	3	13
IHPA-6-36-E	12	208	1	58
	12	208	3	38
	12	240	1	50
	12	240	3	33
	12	480*	3	17
IHPA-8-48-E	16	208	1	77
	16	208	3	58
	16	240	1	67
	16	240	3	50
	16	480*	3	25

AMPERAGE REQUIREMENTS					
MODEL	TOTAL KW	VOLTS	PH	AMPS J-BOX	
				A	B
IHPA-10-60-E	20	208	1	48	48
	20	208	3	43	43
	20	240	1	42	42
	20	240	3	37	37
	20	480*	3	19	19





# ELECTRIC

ELECTRIC ROUNDTYPES | HOT PLATES 19-3/8" DEPTH

# IMPERIAL



## IHPA-3-36-E

Model Numbers

IHPA-1-12-E

IHPA-2-24-E

IHPA-3-36-E

IHPA-4-48-E



9" (229 MM) SEALED ROUND  
PLATE ELEMENTS WITH EASY  
TO CLEAN FLAT SURFACE.



LARGE 5" (127 MM) STAIN-  
LESS STEEL LANDING LEDGE  
FOR CONVENIENT PLATING.

## ROUND PLATE ELEMENTS

- 2 KW round plate elements with easy-to-clean flat surface.
- Provides a solid flat surface for fast, even heating.
- Plates are 9" (229) diameter for maximum pan contact.
- Solid top prevents spills from entering unit making clean-up easy.
- Infinite heat controls for maximum cooking flexibility.


## EXTERIOR FEATURES

- Stainless steel front, top and sides for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range match profile when placed on a refrigerated base or equipment stand.
- Large 5" (127 mm) stainless steel landing ledge is ideal for plating.
- Control knobs are durable cast aluminum with a Valox™ "cool to the touch" grip.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.




ELECTRIC

ELECTRIC ROUNDTYPES | HOT PLATES 19-3/8" DEPTH

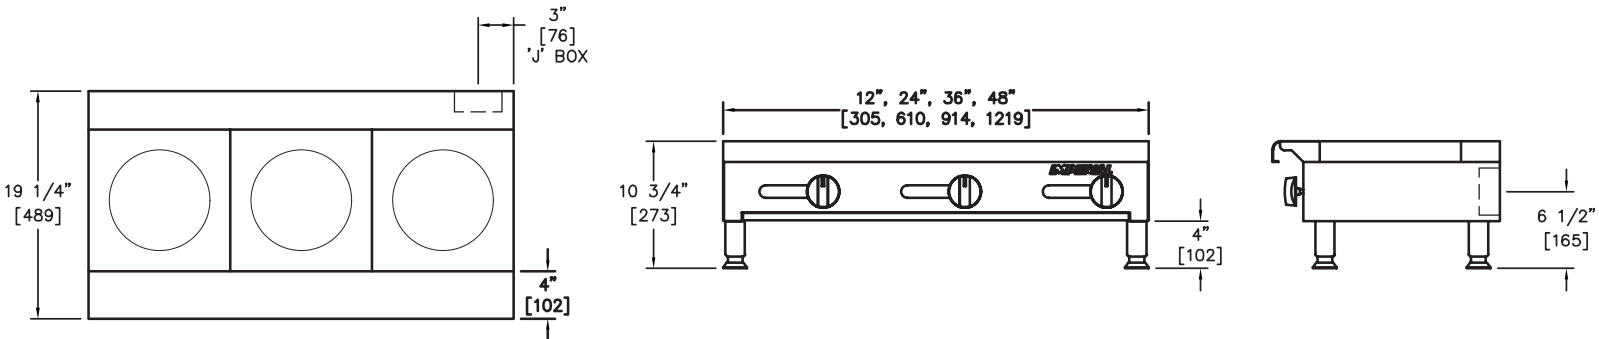

ELECTRIC HOT PLATES - 19-3/8" (492 MM) DEPTH

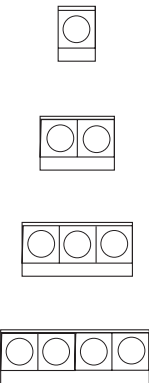

MODEL	WIDTH INCHES (MM)	ROUND ELEMENTS	OUTPUT KW	SHIP WEIGHT	
				KG	LBS
IHPA-1-12-E	12" (305)	1	2	21	45
IHPA-2-24-E	24" (610)	2	4	37	80
IHPA-3-36-E	36" (914)	3	6	53	115
IHPA-4-48-E	48" (1219)	4	8	64	140

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHPA-1-12-E	12" W X 19-3/8" D X 10-3/4" H (305 X 492 X 273 MM)	14-1/2" W X 23" D X 12" H (368 X 584 X 324 MM)
IHPA-2-24-E	24" W X 19-3/8" D X 10-3/4" H (610 X 492 X 273 MM)	26-1/2" W X 23" D X 12" H (673 X 584 X 324 MM)
IHPA-3-36-E	36" W X 19-3/8" D X 10-3/4" H (914 X 492 X 273 MM)	38-1/2" W X 23" D X 12" H (965 X 584 X 324 MM)
IHPA-4-48-E	48" W X 19-3/8" D X 10-3/4" H (1219 X 492 X 273 MM)	50-1/2" W X 23" D X 12" H (1283 X 584 X 324 MM)

AMPERAGE REQUIREMENTS				
MODEL	TOTAL KW	VOLTS	PH	AMPS
IHPA-1-12-E	2	208	1	10
	2	240	1	8
IHPA-2-24-E	4	208	1	19
	4	208	3	14
	4	240	1	17
	4	240	3	13
IHPA-3-36-E	4	480*	3	6
	6	208	1	29
	6	208	3	17
	6	240	1	25
IHPA-4-48-E	6	240	3	15
	6	480*	3	17
	8	208	1	39
	8	208	3	29
	8	240	1	33
	8	240	3	25
	8	480*	3	13

CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 480 volts(additional charge)

